



Counterweights

Counterweight	External, stainless steel AISI 316 (provided with the float switch)
---------------	---

Activation angle	30°
------------------	-----

Relay outputs

Number of relays	Nr.	1
Contact arrangement		1 changeover contact C/O- SPDT
Rated operational voltage AC (IEC)	VAC	250
Contact ratings		AC1 10A 250VAC AC15 8A 250VAC

Connections

Maximum cable lenght	m / ft	10
----------------------	--------	----


Ambient conditions

Temperature			
Operating temperature	max	°C	+50
	min	°C	-20
Storage temperature	max	°C	+80
	min	°C	-20
Maximum operating pressure	bar		2
Maximum installation depth	m		20

Housing

Cable material	PVC AD8 3G1 for drinking water, healt certified ACS
Float casing material	Polypropylene
IEC degree of protection	IP68
Weight	g1430

Dimensions

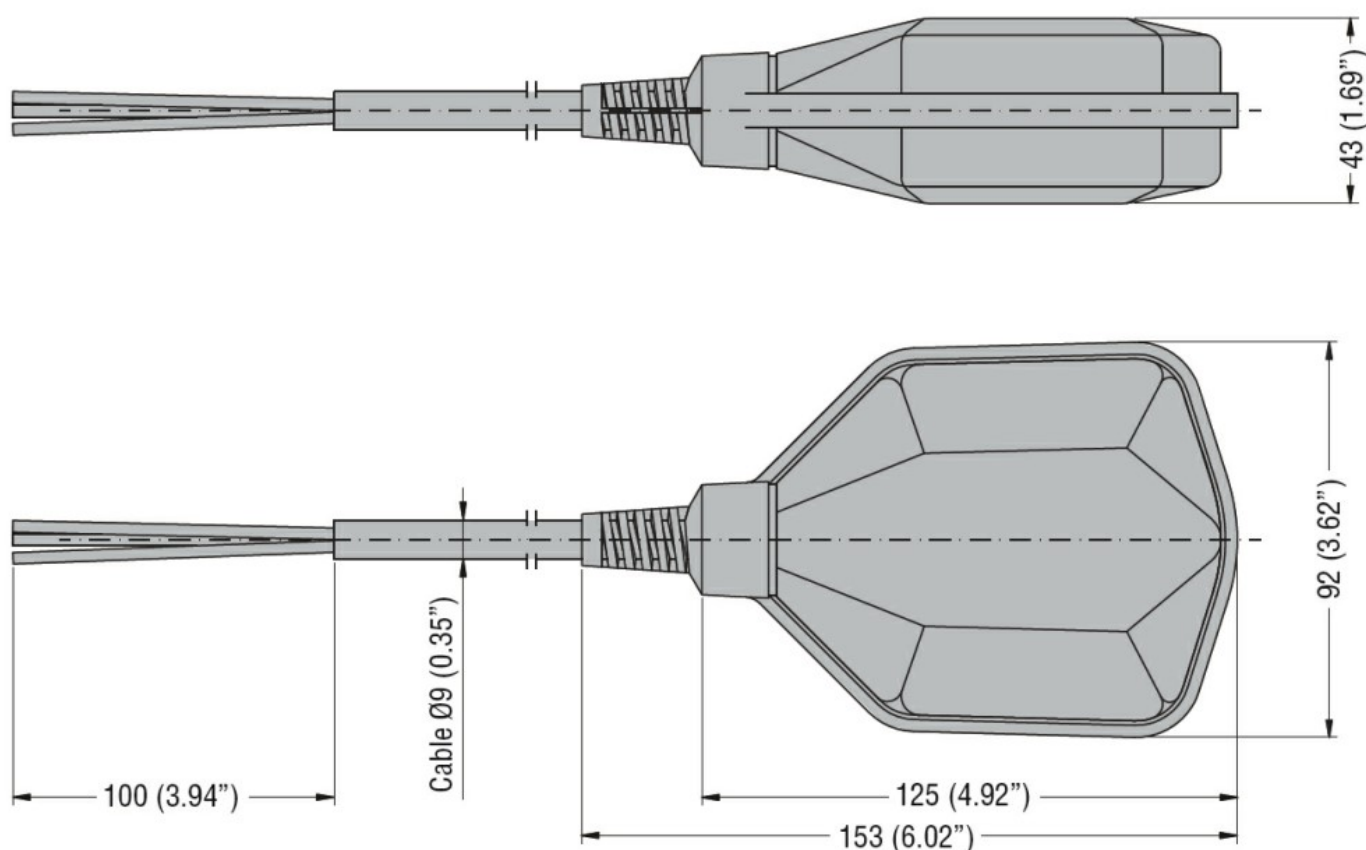

Certifications and compliance

Compliance

IEC/EN 60730-1

IEC/EN 60730-2-15.

Certificates

ACS (Attestation de Conformité Sanitaire)

ETIM classification

ETIM 8.0

EC001447 - (Fill)
level monitoring
relay