



Counterweights

Counterweight	External (provided with the float switch)		
Activation angle	45°		

Relay outputs

Number of relays	Nr.	1
Contact arrangement	1 changeover contact C/O-SPDT	
Rated operational voltage AC (IEC)	VAC	250
Contact ratings	AC1 10A 250VAC AC15 8A 250VAC	

Connections

Maximum cable length	m / ft	20
----------------------	--------	----


Ambient conditions

Temperature					
	Operating temperature		max	°C	+50
	Storage temperature		max	°C	+80
Maximum operating pressure			bar	3	
Maximum installation depth			m	30	

Housing

Cable material	Neoprene H07 RN-F3X1	
Float casing material	Polypropylene	
IEC degree of protection	IP68	
Weight	g	2480

Dimensions

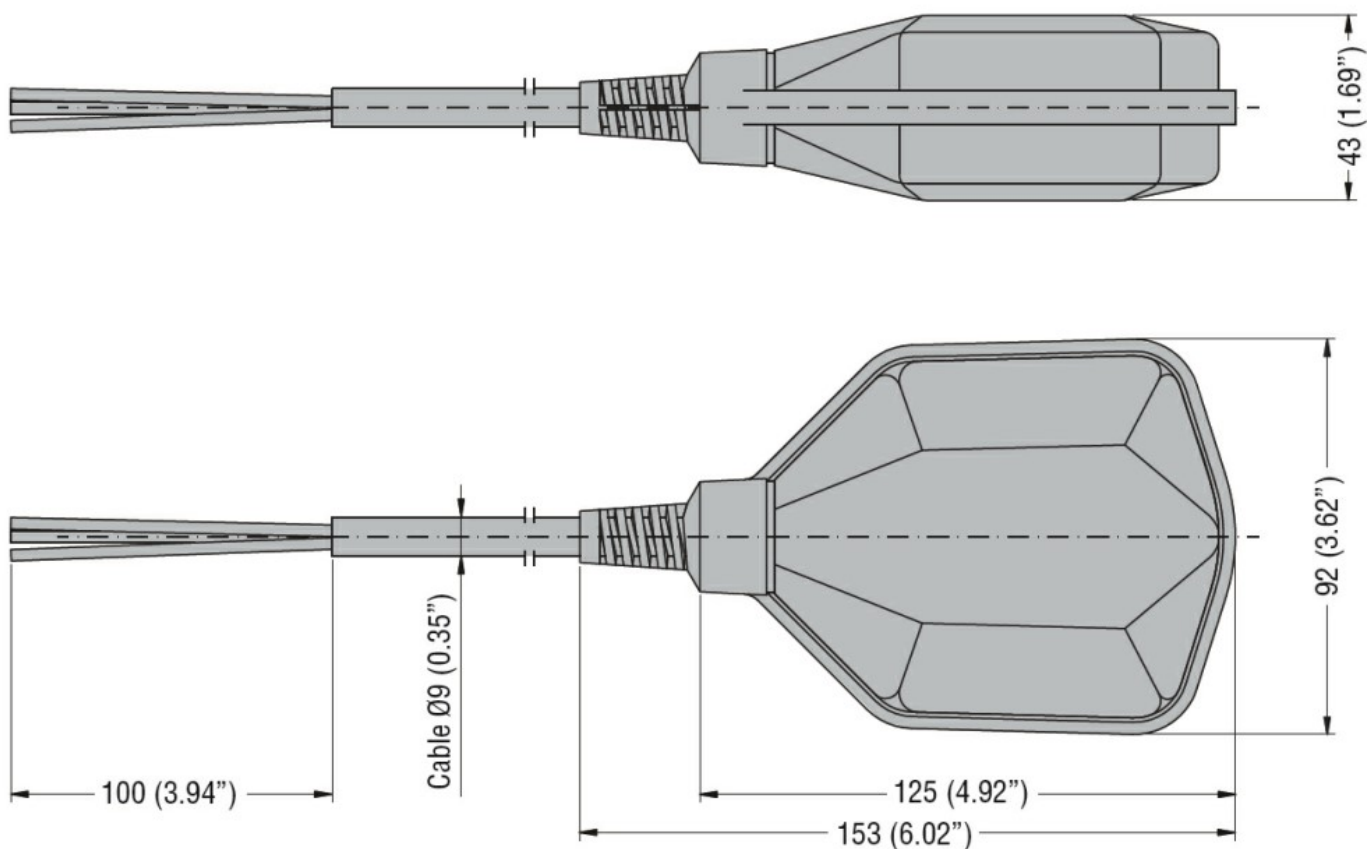

Certifications and compliance

Compliance

IEC/EN 60730-1

IEC/EN 60730-2-15

Certificates

TÜV-SUD

ETIM classification

ETIM 8.0

EC001447 - (Fill)
level monitoring
relay