




Counterweights			
Counterweight			External (provided with the float switch)
Activation angle			45°
Relay outputs			
Number of relays		Nr.	1
Contact arrangement			1 changeover contact C/O-SPDT
Rated operational voltage AC (IEC)		VAC	250
Contact ratings			AC1 10A 250VAC AC15 8A 250VAC
Connections			
Maximum cable lenght		m / ft	3
Ambient conditions			
Temperature			
Operating temperature		max	°C +50
Storage temperature		max	°C 80
Maximum operating pressure		bar	3
Maximum installation depth		m	30
Housing			
Cable material			PVC A05 VV-F3X1
Float casing material			Polypropylene
IEC degree of protection			IP68
Weight		g	610
Dimensions			

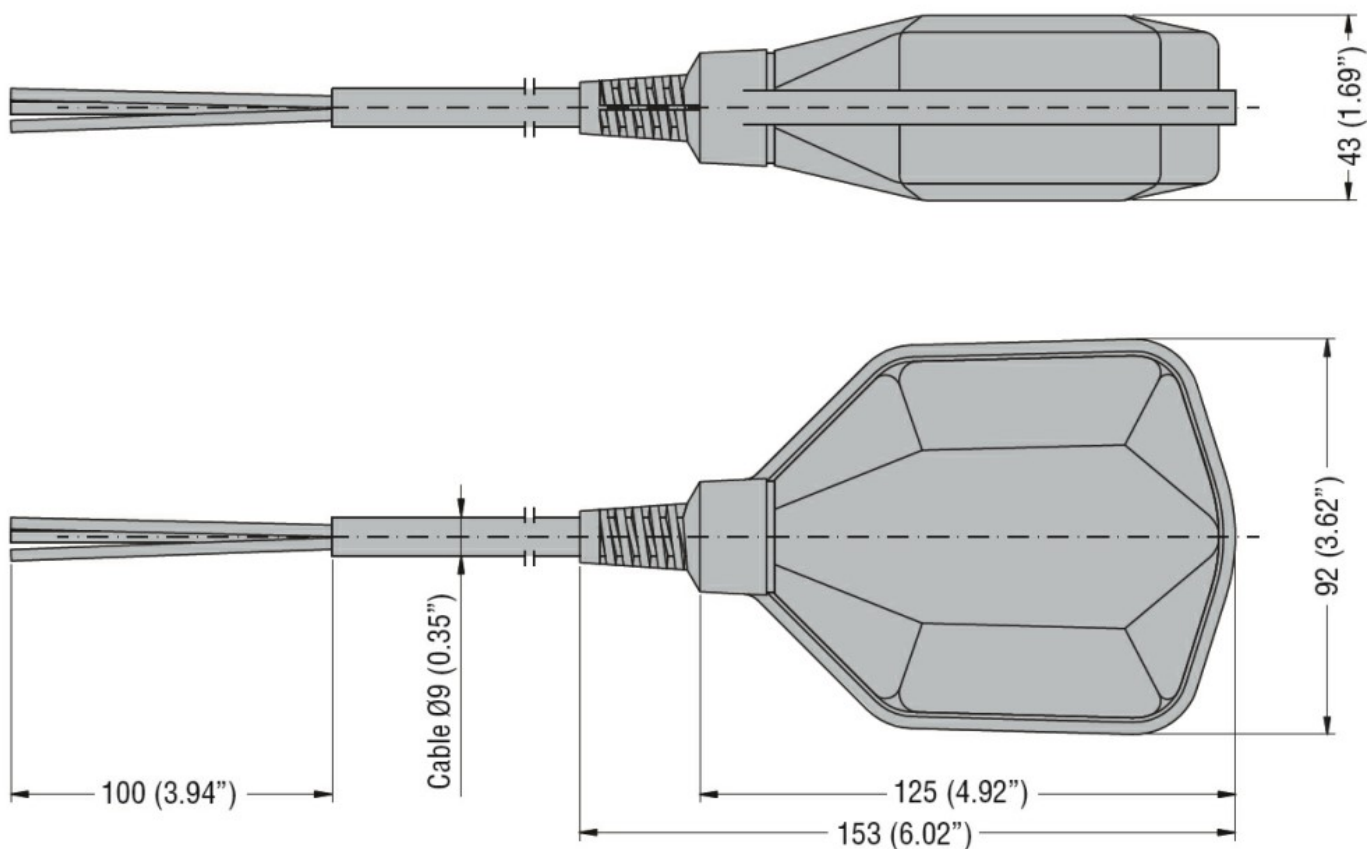

Certifications and compliance

Compliance

IEC/EN 60730-1
IEC/EN 60730-2-15

Certificates

TÜV-SUD

ETIM classification

ETIM 8.0

EC001447 - (Fill)
level monitoring
relay