



Auxiliary supply

Supply voltage Type	Multi voltage		
Rated auxiliary supply voltage Us	AC		
	min	VAC	20,4
	Max	VAC	28,8
Operating voltage range	20.4...28.8VAC		
Rated frequency		Hz	50/60
Operational frequency	min	Hz	47
	max	Hz	63
Power dissipation Max		W	7.5

Relay outputs

Number of relays	Nr.	4
Relay state	Normally de-energised, energises at tripping	
Contact arrangement	4 NO	
Rated operational voltage AC (IEC)	VAC	250
Maximum switching voltage	VAC	265
IEC Conventional free air thermal current Ith ≤ 40°C	A	8
Electrical life (with rated load)	cycles	10 ⁵



Indications

Indication	Display for monitoring motor status, number of starts and working hours
------------	---


Functions

3 detecting electrodes (MIN, MAX and COM)	No
5 detecting electrodes (MIN1, MAX1, MIN2, MAX2 and COM)	No
Sensitivity adjustment 2.5...50k Ω	No
Sensitivity adjustment 2.5...100k Ω	No
Sensitivity adjustment 2.5...200k Ω	No
Adjustable sensitivity full-scale value 25-50-100-200 k Ω	No
Separate sensitivity adjustment for MAX probe (foam detection)	No
Emptying function	No
Filling function	No
Emptying function with MIN and/or MAX alarm	No
Filling function with MIN and/or MAX alarm	No
Emptying function with pump priority change	No
Filling function with pump priority change	No
Tank filling, well drawing and alarm	No
Filling-emptying adjustment selector	No

Programming selector for 5 different			No		
Motor start-up priority change			Yes		
Connections					
Terminals type			Screw		
Tightening torque for terminals			max	Nm	0.6
			max	Ibin	5.3
Conductor cross section					
AWG/Kcmil			min	AWG	26
			Max	AWG	14
IEC			min	mm²	0.14
			Max	mm²	2.5
Ambient conditions					
Temperature					
Operating temperature			min	°C	-20
			max	°C	+55
Storage temperature			min	°C	-40
			max	°C	+70
Relative humidity				%	20...90
Housing					
Execution			Modular DIN rail mounting		
N° of modules			4		
Material			Polyamide		
Mounting			35mm DIN rail (IEC/EN 60715) or by screws using extractable clips		
IEC degree of protection			IP20		
Dimensions (W x H x D)			mm	72 x 106 x 59.6	
Weight			g	250	
Dimensions					

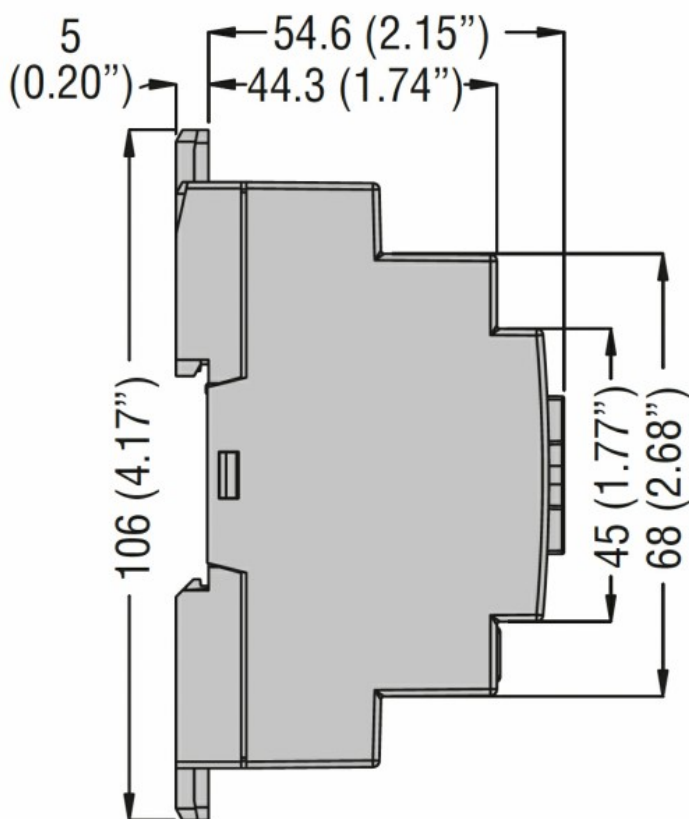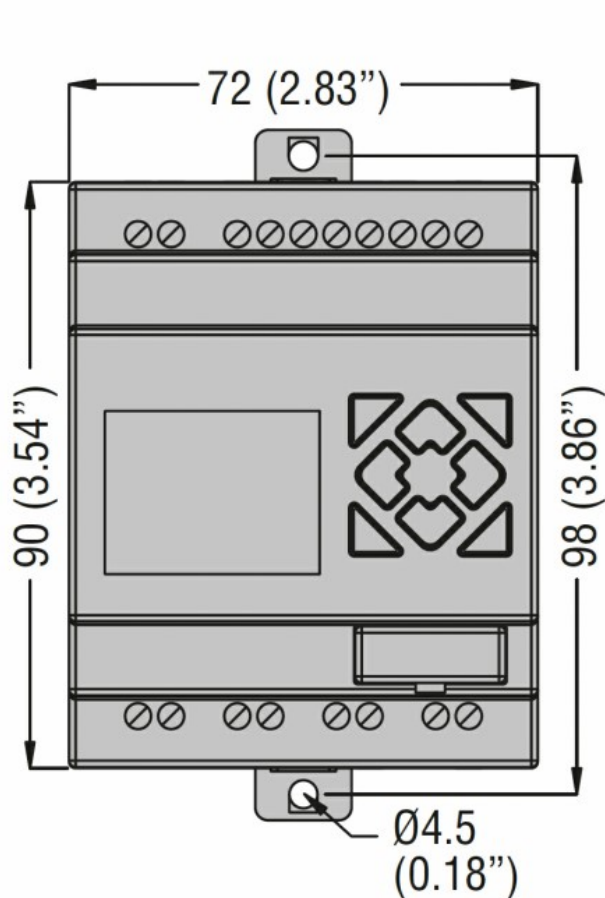

Wiring diagrams

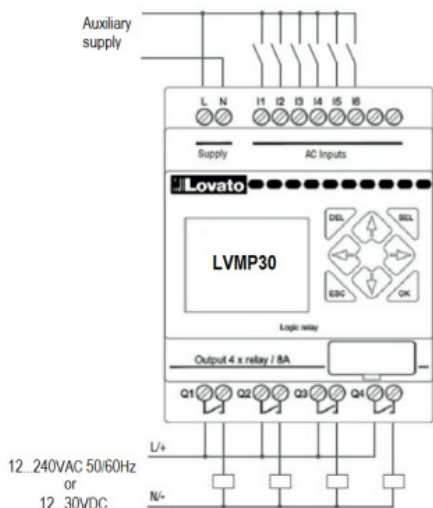

Terminals / Morsetti	Description	Descrizione
L-N	Auxiliary supply: LVMP30A024: 24VAC 50/60Hz LVMP30A240: 100...240VAC 50/60Hz	Alimentazione ausiliaria: LVMP30A024: 24VAC 50/60Hz LVMP30A240: 100...240VAC 50/60Hz
I1	Minimum level (enable)	Livello minimo (abilitazione)
I2	Start pump 1 input	Ingresso start pompa 1
I3	Start pump 2 input	Ingresso start pompa 2
I4	Start pump 3 input	Ingresso start pompa 3
I5	Start pump 4 input	Ingresso start pompa 4
I6	Latch enable	Abilitazione memoria
Q1	Pump 1 command output	Uscita comando pompa 1
Q2	Pump 2 command output	Uscita comando pompa 2
Q3	Pump 3 command output	Uscita comando pompa 3
Q4	Pump 4 command output	Uscita comando pompa 4

Certifications and compliance

Compliance

CSA C22.2 n°142
IEC/EN/BS 61131-2
UL508

Certificates

cULus
EAC

ETIM classification

ETIM 8.0

EC001447 - (Fill)
level monitoring
relay