




Electrical features			
Maximum operating current (≤440V)	A	12	
Components			
Contactor standard supplied		BG06, BG09, BG12	
Thermal relay to purchase separately		RFA9	
UL technical data			
UL degree of protection		Type 1, 12K, 4, 4X	
Mechanical features			
Weight	g	405	
Ambient conditions			
Operating temperature	min	°C	-25
	max	°C	+60
Storage temperature	min	°C	-40
	max	°C	+70
Resistance & Protection			
IEC degree of protection		IP65	
Dimensions			

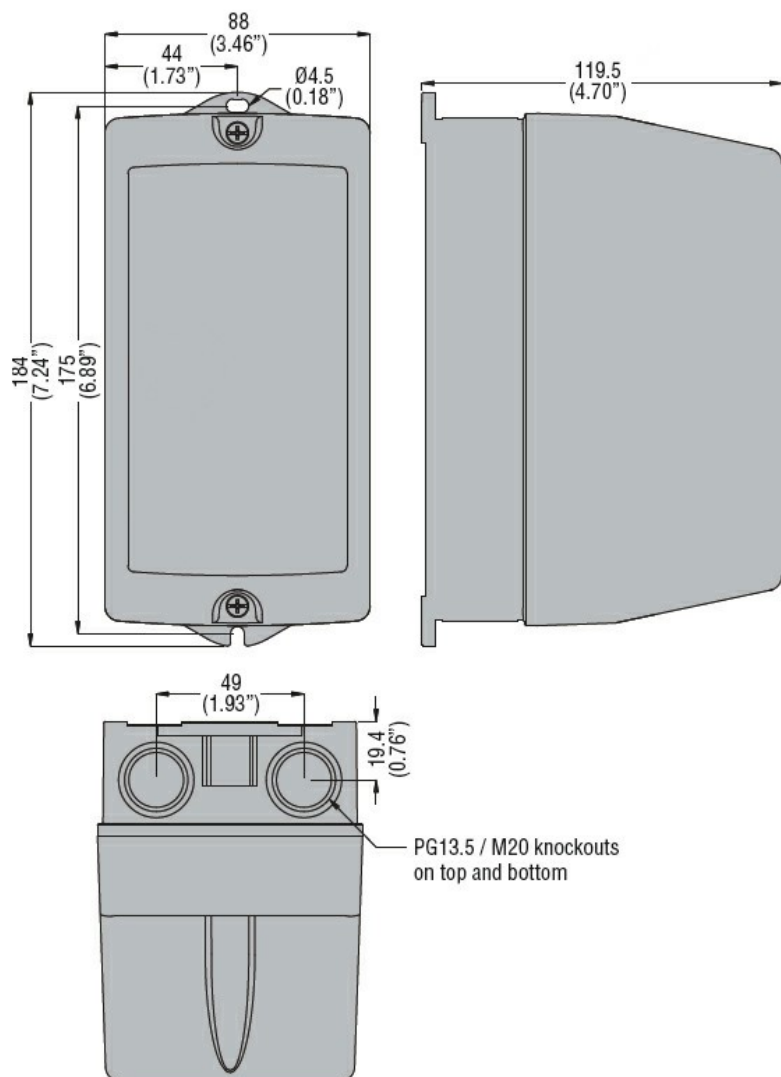

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-4-1

UL508

Certificates

cULus

ETIM classification

ETIM 8.0

EC000200 -
Enclosure for
control circuit
devices