
M0R0121240015

DIRECT-ON-LINE-STARTER, ENCLOSED WITH THERMAL OVERLOAD RELAY, WITH RESET PUSHBUTTON, WITH BG09/BG12 CONTACTOR, 12A MAX (5.5KW AT 400V), IP65. CONTACTOR COIL VOLTAGE 400VAC 50/60HZ




Electrical features			
Relay adj range		A	9-15
IEC technical characteristics (≤440V)			
	Ie	A	12
	kW	kW	5.5
Components			
Starter enclosure standard supplied			M0RA
Contactor standard supplied			BG1210A
Thermal relay standard supplied			RF915
UL technical data			
UL degree of protection			Type 1, 12K, 4, 4X
Mechanical features			
Weight		g	720
Ambient conditions			
Operating temperature			
	min	°C	-25
	max	°C	+60
Storage temperature			
	min	°C	-40
	max	°C	+70
Resistance & Protection			
IEC degree of protection			IP65
Dimensions			

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

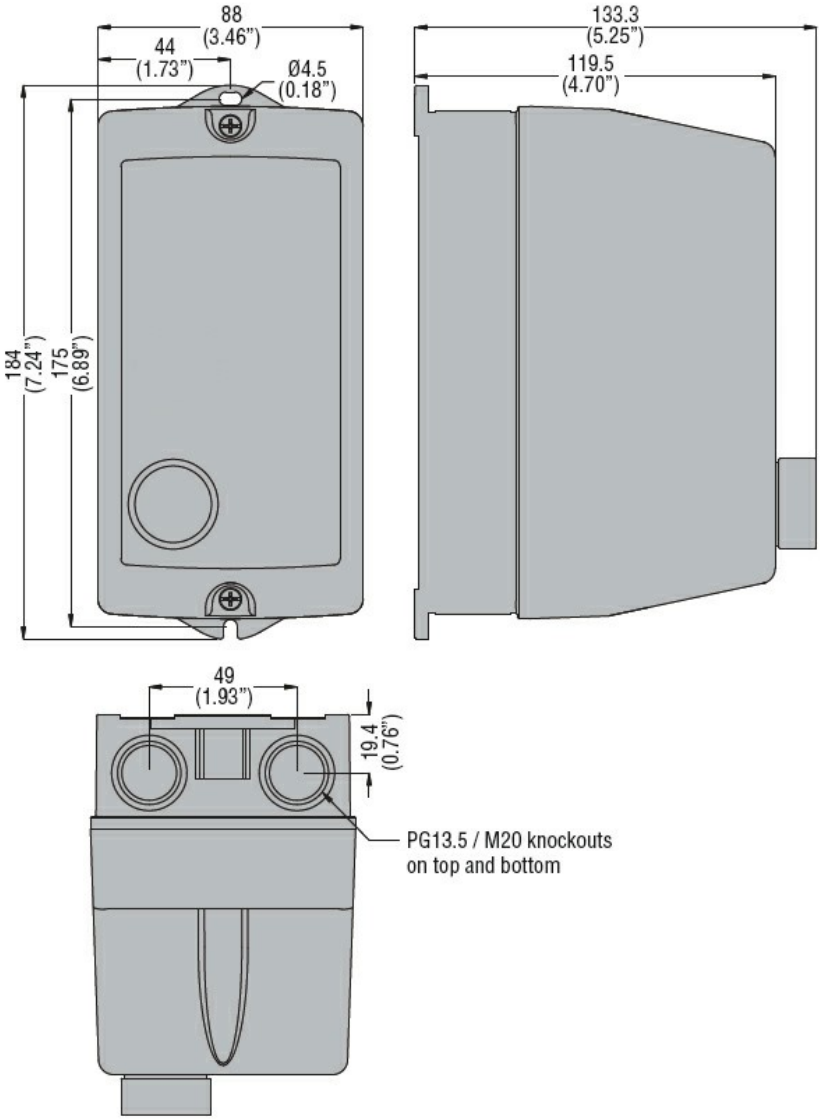

Wiring diagrams

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

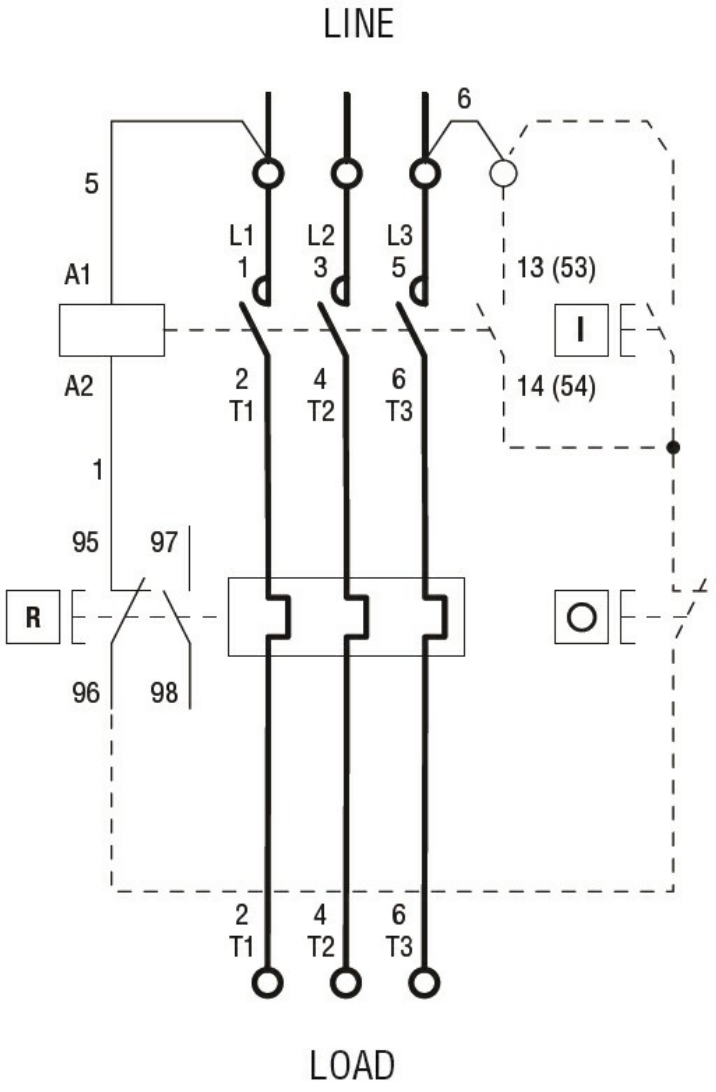

R = Reset; I = Start; O = Stop

Certifications and compliance

Compliance	
	IEC/EN 60947-1
	IEC/EN 60947-4-1
	UL508 CSA C22.2 n° 14
Certificates	
	CSAus
	cULus
	EAC

ETIM classification

ETIM 8.0	EC001037 - Motor starter/Motor starter combination

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding