P1RD4P40AC300

WYŁĄCZNIK RÓŻNICOWOPRĄDOWY - 4P - TYP AC, 40A, 300MA

Właściwości elektryczne			
Znamionowe napięcie izolacji Ui IEC/EN		V	400
Znamionowe napięcie udarowe Uimp		kV	4
Znamionowe napięcie robocze AC (IEC)		VAC	230/400
Częstotliwość znamionowa		Hz	50/60
Prąd znamionowy (In)		A	40
Charakterystyka pracy szczątkowej			AC
Znamionowy prąd resztkowy		mA	300
Klasyfikacja prądu zwarciowego (IEC)		kA	10
Znamionowy warunkowy prąd zwarciowy (Inc)		kA	10
Trwałość elektryczna		cycles	10000
Warunki otoczenia			
Temperatura pracy			
	min.	°C	-35
	maks.	°C	+70
Temperatura składowania			
	min.	°C	-40
	maks.	°C	+80
Maks. wysokość		m	2000
Właściwości mechaniczne			
Pozycja montażowa			
	normalna		Płaszczyzna pionowa
Montaż			Szyna DIN 35 mm
Moment obrotowy dokręcania zacisków			
	maks.	Nm	2
	maks.	lbin	15
Narzędzie do zacisków			Pz 2
Przekrój przewodu			
IEC			
	min.	mm²	2.5
	maks.	mm²	35
AWG/Kcmil			
	min.		14
	maks.	kcmil	2
Trwałość mechaniczna		cycles	20000
Masa		g	326
Stopień ochrony IP od frontu			IP20
Stopień zanieczyszczenia			2
Wymiary			

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

P1RD4P40AC300

WYŁĄCZNIK RÓŻNICOWOPRĄDOWY - 4P - TYP AC, 40A, 300MA

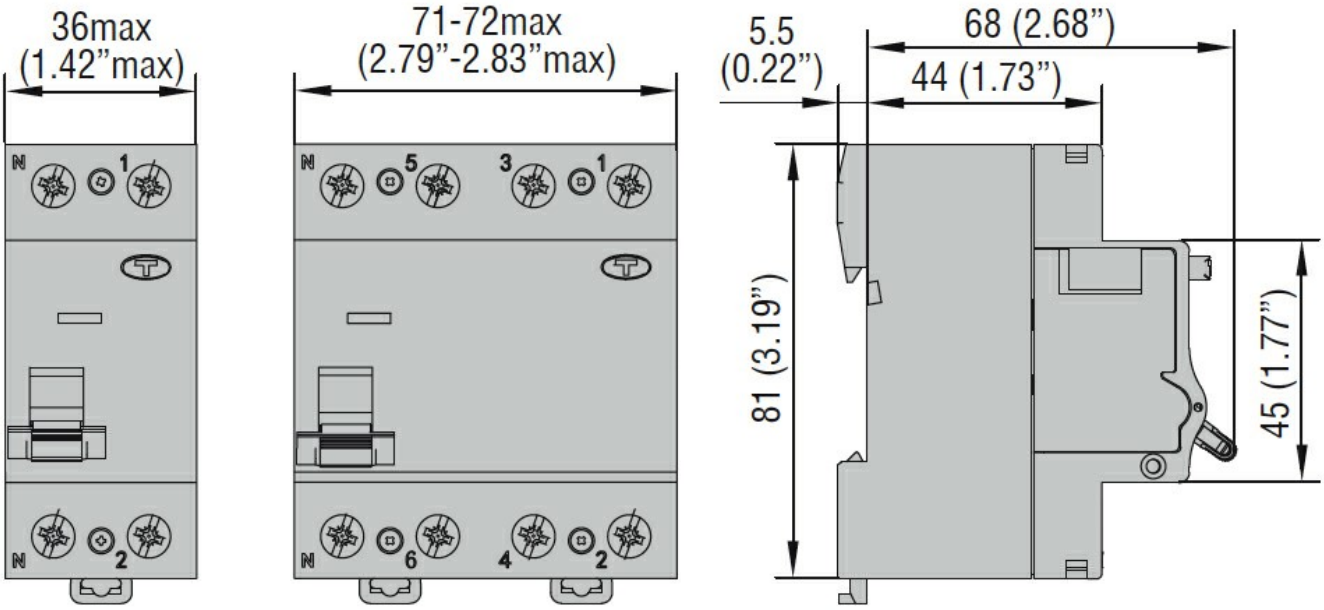

Schemat połączeń elektrycznych

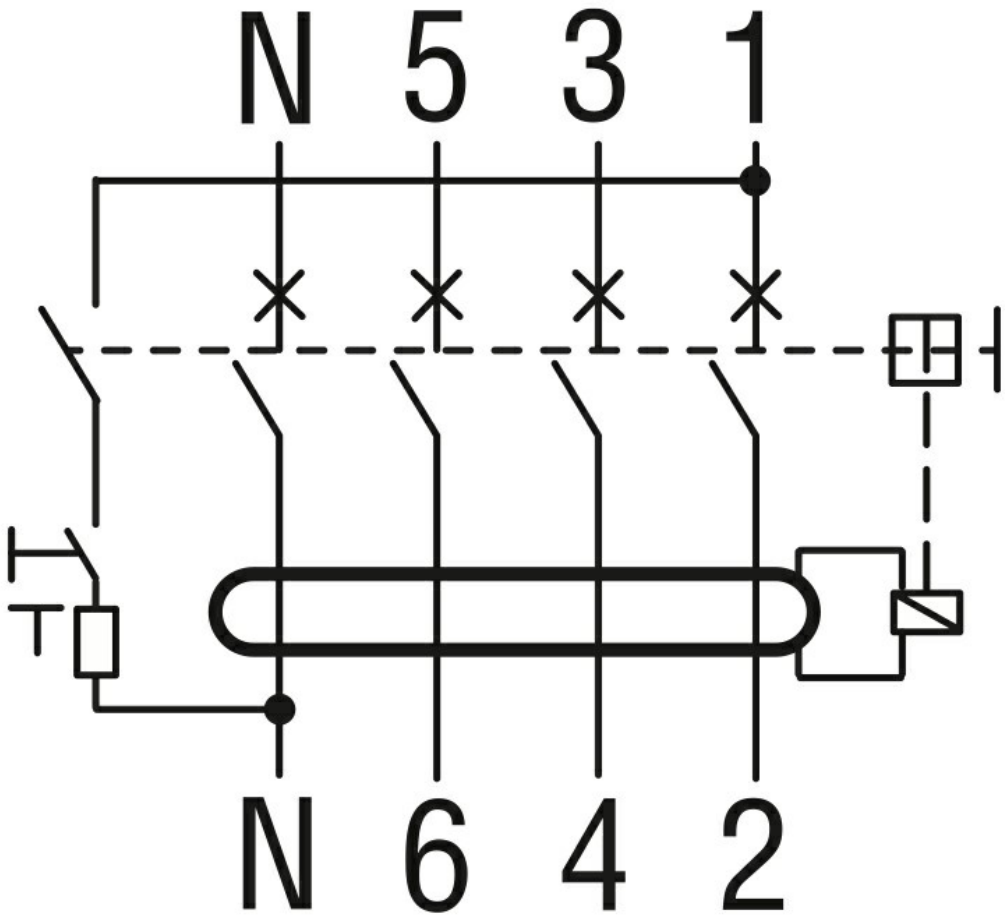

Certyfikaty i zgodność

Zgodność

IEC/EN/BS 61008-1

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

Certyfikaty

	EAC
	TÜV-Rheinland

Klasyfikacja ETIM

ETIM 8,0	EC000003 - Wyłącznik różnicowoprądowy

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding