




Operational characteristics

IEC maximum current (I _{max})	A	25
---	---	----

Mechanical features

Operating position	normal	Other
Weight	g	35

Dimensions

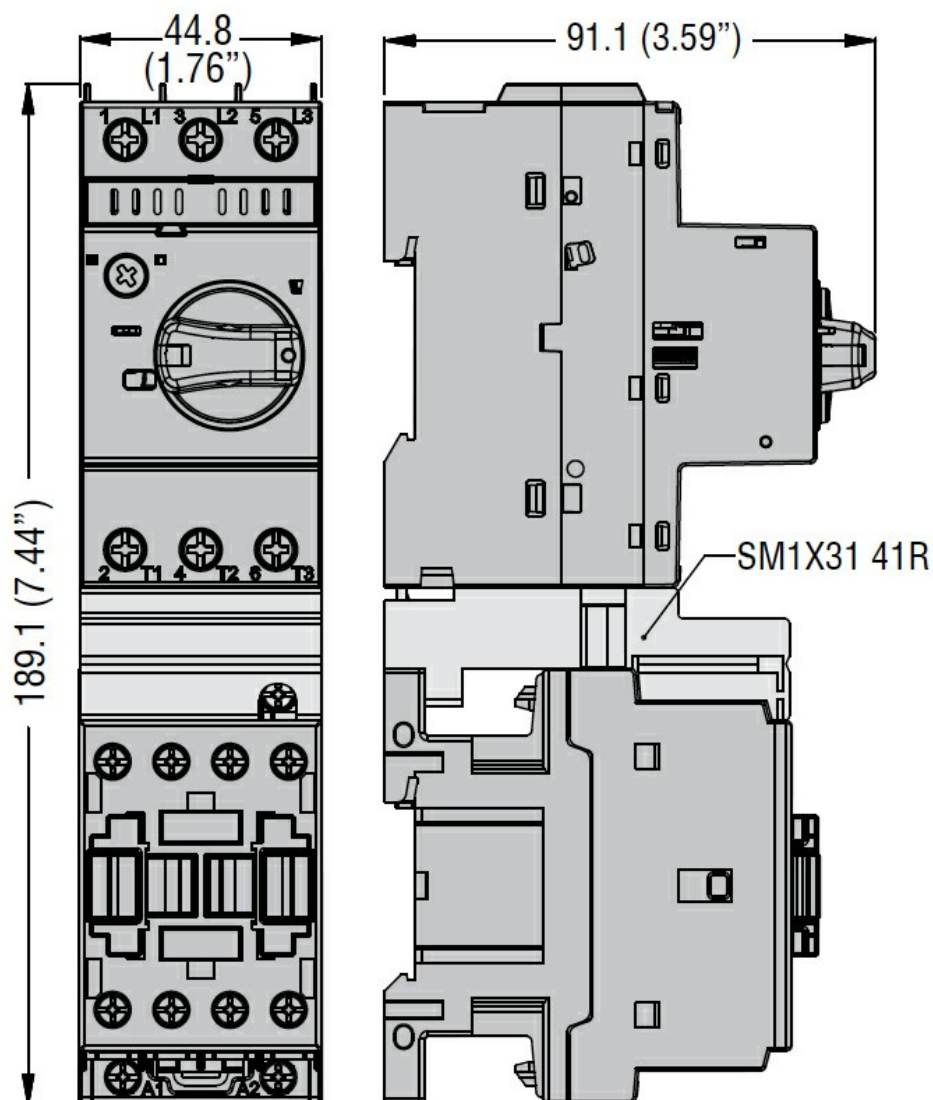

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification
