




## Dimensioni

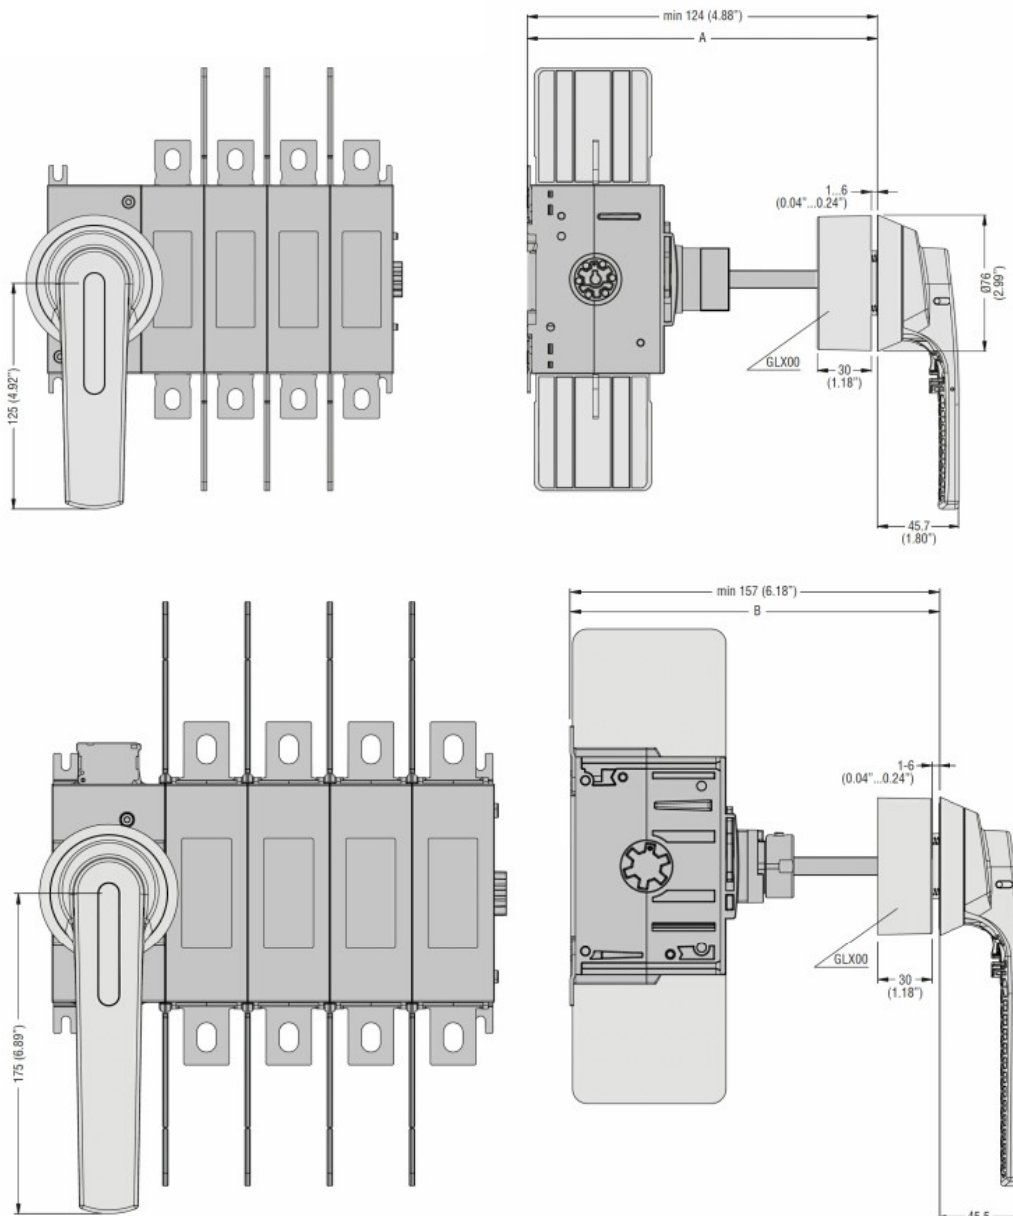

| GLX7...S10<br>with GLC0100...GL0315 | A mm (in)<br>min max      |
|-------------------------------------|---------------------------|
| GLX7150S10                          | 124...194 (4.88...7.64")  |
| GLX7200S10                          | 124...244 (4.88...9.61")  |
| GLX7300S10                          | 124...344 (4.88...13.54") |
| GLX7400S10                          | 124...444 (4.88...17.48") |
| GLX7500S10                          | 124...544 (4.88...21.42") |

| GLX7...S10<br>with GLC0320...GL0630 | B mm (in)<br>min max      |
|-------------------------------------|---------------------------|
| GLX7150S10                          | 157...227 (6.18...8.94")  |
| GLX7200S10                          | 157...277 (6.18...10.90") |
| GLX7300S10                          | 157...377 (6.18...14.84") |
| GLX7400S10                          | 157...477 (6.18...18.78") |
| GLX7500S10                          | 157...577 (6.18...22.72") |

## Omologazioni e conformità

### Omologazioni

IEC/EN 60947-1

IEC/EN 60947-3

### Certificazioni

cULus

## Classificazione ETIM

ETIM 8.0

EC002498 -  
Accessori per  
dispositivi di  
commutazione  
bassa tensione