



Electrical features

Maximum operating current ($\leq 440V$) A 20

Contact characteristics

Operational current Ie

AC-1 ($\leq 40^{\circ}C$)	A	20
AC-1 ($\leq 55^{\circ}C$)	A	18
AC-1 ($\leq 60^{\circ}C$)	A	15

Rated operational power AC-1 ($T \leq 40^{\circ}C$)

230V	kW	8
400V	kW	14
500V	kW	16
690V	kW	22

UL technical data


UL/CSA General Use A 20

Mechanical features


Terminals type Clamp screw

Weight g 450

Dimensions

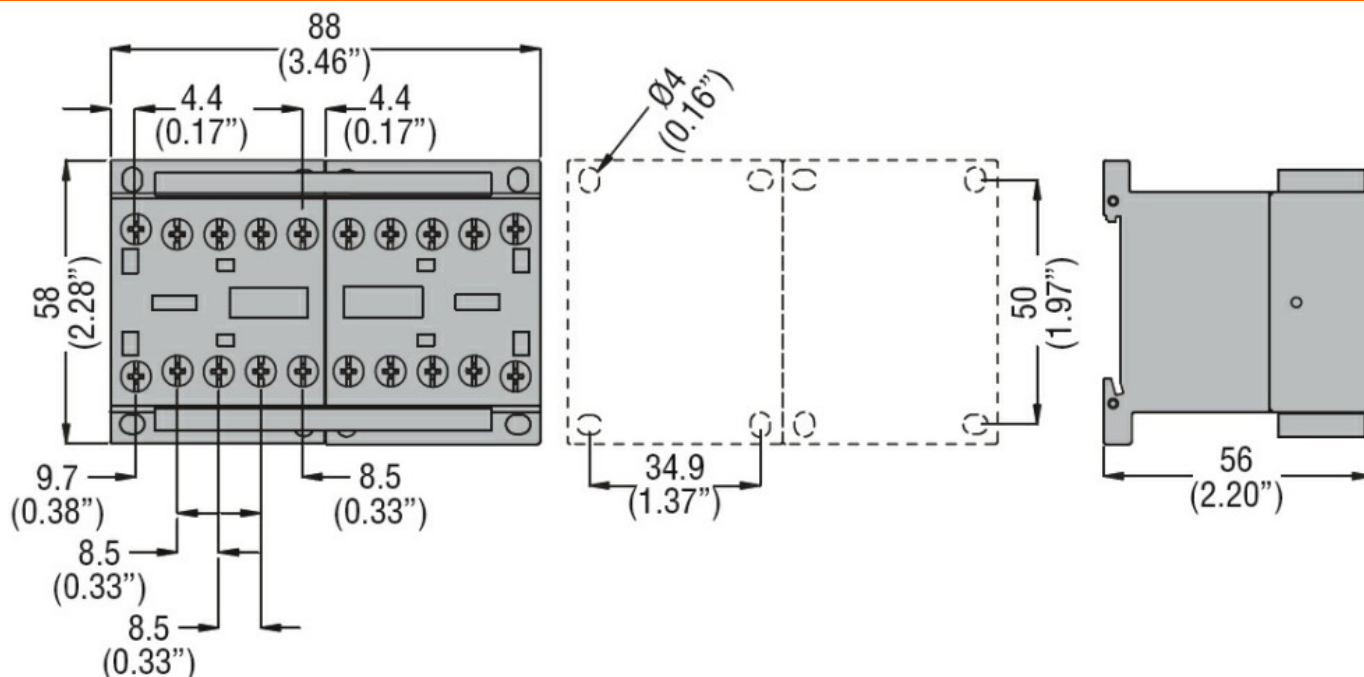

Wiring diagrams

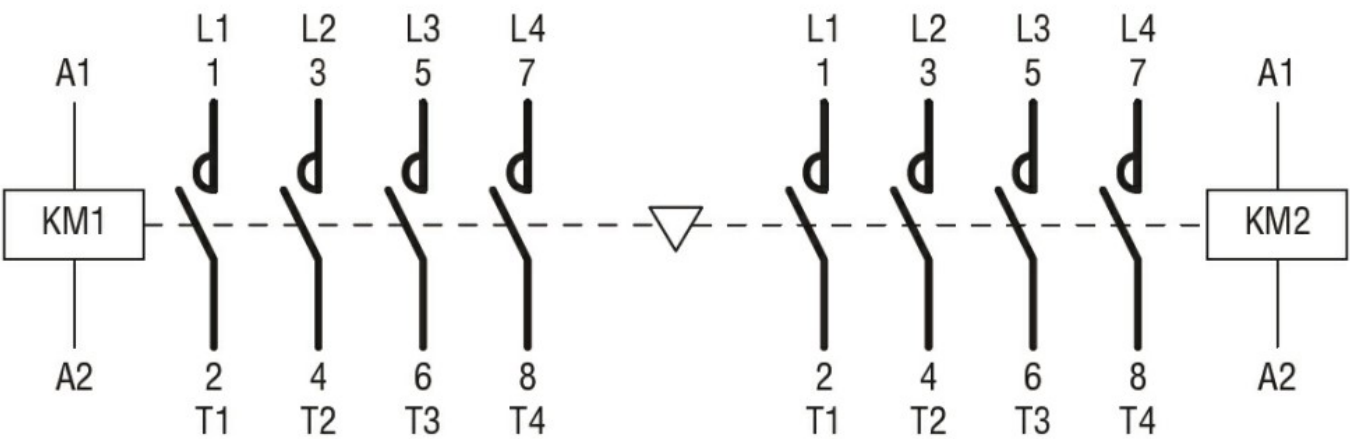

Certifications and compliance

Compliance	IEC/EN 60947-1
	IEC/EN 60947-4-1
	UL508 CSA C22.2 n° 14

Certificates	cULus
--------------	-------

ETIM classification

ETIM 8.0	EC000010 - Combination of contactors
----------	--