



### Contact characteristics

Number of poles		Nr.	4
Rated insulation voltage $U_i$ IEC/EN		V	690
Rated impulse withstand voltage $U_{imp}$		kV	6
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$		A	10
Short-time allowable current for 10s (IEC/EN60947-1)		A	0
Protection fuse			
		gG (IEC)	A 16
Conductor section			
	AWG/Kcmil	max	12

### Mechanical features

Operating position		normal allowable	Vertical plan $\pm 30^\circ$
			Screw / DIN rail 35mm
Fixing			
Weight		g	178

### Auxiliary contact characteristics

Thermal current $I_{th}$		A	10
IEC/EN 60947-5-1 designation			A600 - Q600
Operating current AC15	230V	A	3
	400V	A	1.9
	500V	A	1.4
Operating current DC12	110V	A	2.9
Operating current DC13	24V	A	2.9
	48V	A	1.4
	60V	A	1.1
	125V	A	0.3
	220V	A	0.1
	600V	A	0.6

### Operations

Mechanical life		cycles	20000000
-----------------	--	--------	----------

### Safety related data

Performance level B10d according to EN/ISO 13489-1	mechanical load	cycles	20000000
--	-----------------	--------	----------

EMC compatibility			yes
-------------------	--	--	-----

### AC coil operating

Rated AC voltage at 60Hz		V	120
--------------------------	--	---	-----

AC operating voltage

of 60Hz coil powered at 60Hz				
pick-up	min	%Us	75	
	max	%Us	115	
drop-out	min	%Us	20	
	max	%Us	55	

AC average coil consumption at 20°C

of 50/60Hz coil powered at 50Hz				
	in-rush	VA	30	
	holding	VA	4	
of 50/60Hz coil powered at 60Hz				
	in-rush	VA	25	
	holding	VA	3	
of 60Hz coil powered at 60Hz				
	in-rush	VA	30	
	holding	VA	4	

Dissipation at holding  $\leq 20^{\circ}\text{C}$  50Hz W 0.95

Max cycles frequency

Mechanical operation cycles/h 3600

Operating times

Average time for Us control

in AC				
Closing NO	min	ms	12	
	max	ms	21	
Opening NO	min	ms	9	
	max	ms	18	
Closing NC	min	ms	17	
	max	ms	26	
Opening NC	min	ms	7	
	max	ms	17	

in DC

Closing NO	min	ms	18	
	max	ms	25	
Opening NO	min	ms	2	
	max	ms	3	
Closing NC	min	ms	3	
	max	ms	5	
Opening NC	min	ms	11	
	max	ms	17	

UL technical data

Rated operational voltage AC (UL) V 600

General USE

Contactor				
	AC current	A	10	

Contact rating of auxiliary contacts according to UL

A600 - Q600

**Ambient conditions**

Temperature

Operating temperature

min	°C	-50
max	°C	+70

Storage temperature

min	°C	-60
max	°C	+80

Max altitude


m 3000

**Resistance & Protection**


Pollution degree

3

**Dimensions**

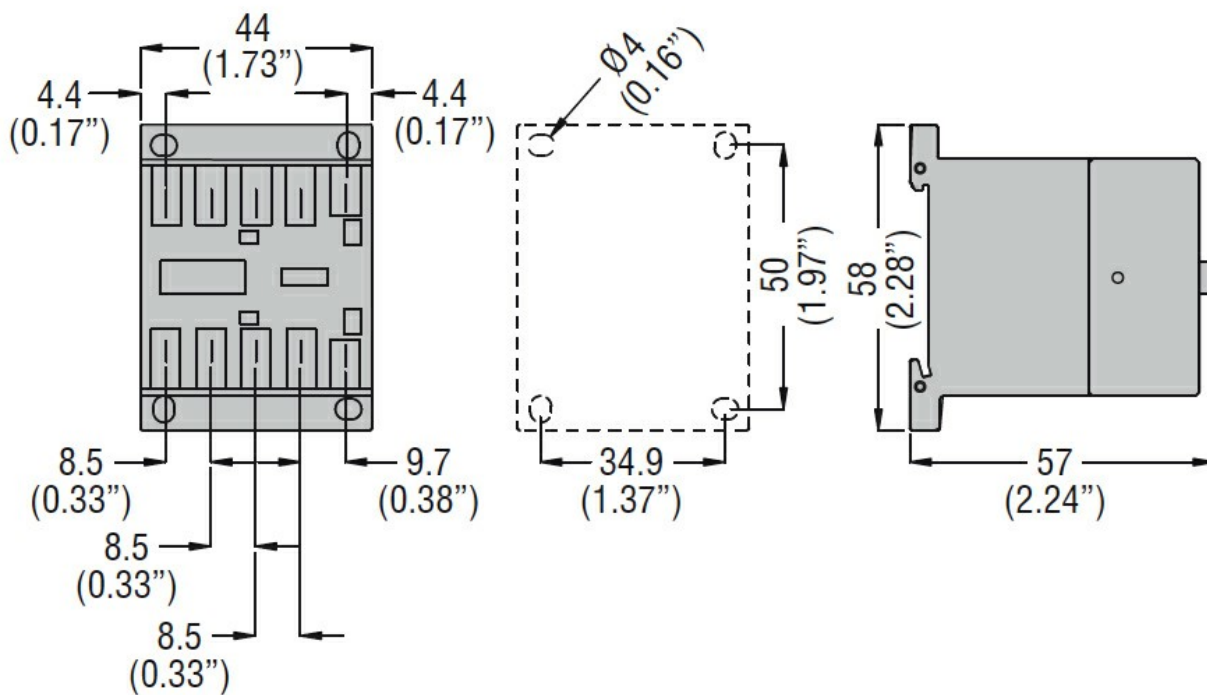

**Wiring diagrams**

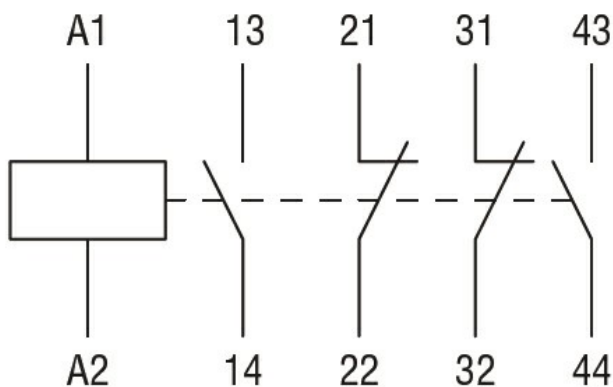

**Certifications and compliance**

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-5-1

IEC/EN 60947-1

IEC/EN 60947-5-1

UL 60947-1

---

UL 60947-5-1

---

Certificates

CCC

---

cULus

---

EAC

**ETIM classification**

ETIM 8.0

EC000196 -  
Contactor relay