



#### Electrical features

|                                           |   |   |
|-------------------------------------------|---|---|
| Maximum operating current ( $\leq 440V$ ) | A | 9 |
|-------------------------------------------|---|---|

#### Contact characteristics

|                           |                                      |   |   |
|---------------------------|--------------------------------------|---|---|
| Operational current $I_e$ | AC-3 ( $\leq 440V \leq 55^\circ C$ ) | A | 9 |
|---------------------------|--------------------------------------|---|---|

|                                                      |      |    |     |
|------------------------------------------------------|------|----|-----|
| Rated operational power AC-3 ( $T \leq 55^\circ C$ ) | 230V | kW | 2.2 |
|                                                      | 400V | kW | 4   |
|                                                      | 415V | kW | 4.3 |
|                                                      | 440V | kW | 4.5 |
|                                                      | 500V | kW | 5   |
|                                                      | 690V | kW | 5   |

#### Built-in auxiliary contacts

|    |   |
|----|---|
| NO | 1 |
| NC | 0 |

#### UL technical data

|                                                |           |    |     |
|------------------------------------------------|-----------|----|-----|
| Maximum UL/CSA horsepower ratings single-phase | 110V-120V | HP | 0.5 |
|                                                | 220V-240V | HP | 1.5 |


|                                                       |           |    |   |
|-------------------------------------------------------|-----------|----|---|
| Maximum UL/CSA horsepower ratings three-phase, 3-pole | 200V-208V | HP | 2 |
|                                                       | 220V-240V | HP | 3 |
|                                                       | 440V-480V | HP | 5 |
|                                                       | 550V-600V | HP | 5 |

#### Mechanical features


|                |             |
|----------------|-------------|
| Terminals type | Clamp screw |
|----------------|-------------|

|        |   |     |
|--------|---|-----|
| Weight | g | 445 |
|--------|---|-----|

#### Dimensions

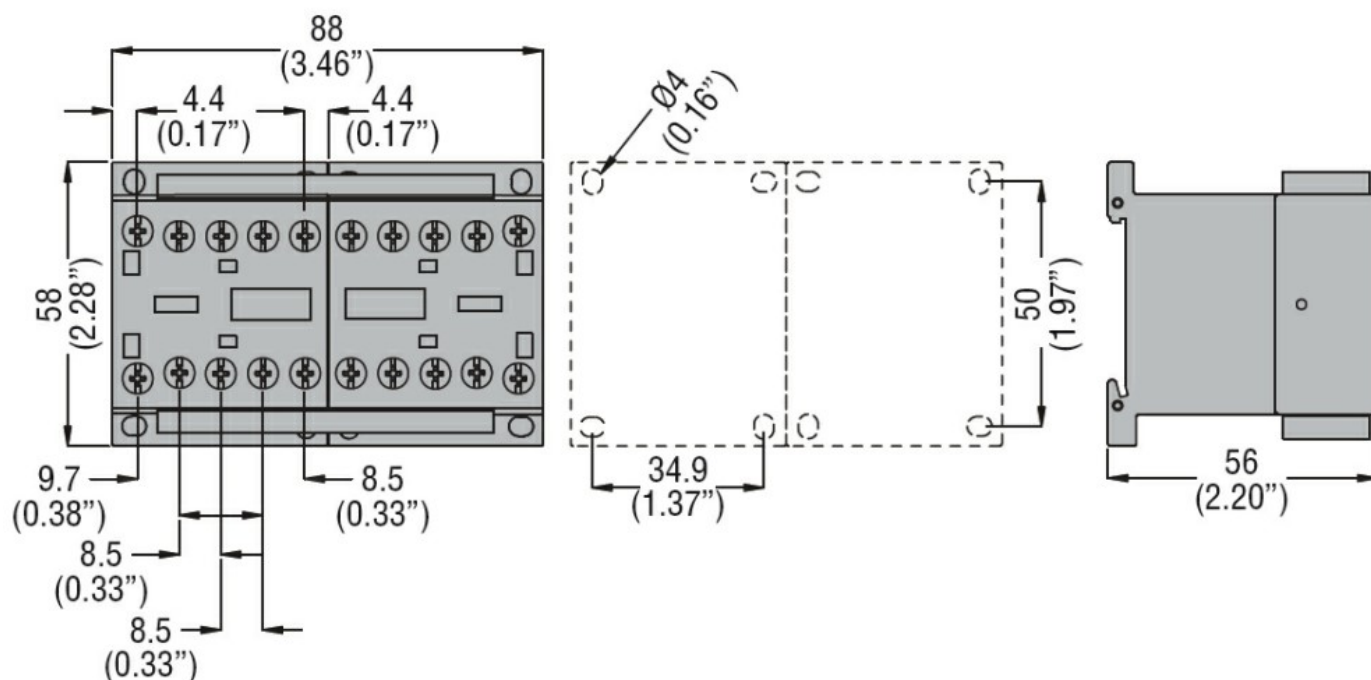

#### Wiring diagrams

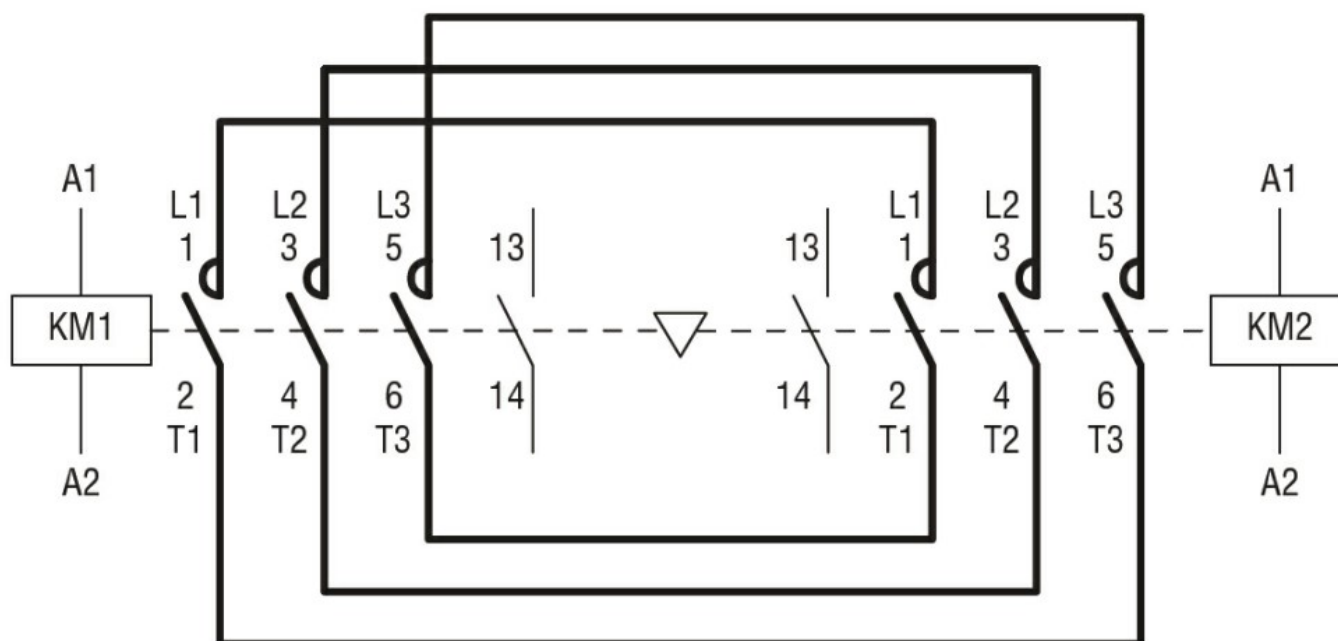

#### Certifications and compliance

##### Compliance

IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508 CSA C22.2 n° 14

##### Certificates

cULus

#### ETIM classification

ETIM 8.0

EC001037 -  
Motor  
starter/Motor  
starter  
combination

