



Electrical features

Maximum operating current ($\leq 440V$)	A	12
---	---	----

Contact characteristics

Operational current Ie	AC-3 ($\leq 440V \leq 55^{\circ}C$)	A	12
------------------------	---------------------------------------	---	----

Rated operational power AC-3 ($T \leq 55^{\circ}C$)			
---	--	--	--

230V	kW	3.2
400V	kW	5.7
415V	kW	6.2
440V	kW	5.5
500V	kW	5
690V	kW	5

Built-in auxiliary contacts		
-----------------------------	--	--

NO	1
NC	0

UL technical data

Maximum UL/CSA horsepower ratings single-phase			
--	--	--	--

110V-120V	HP	0.5
220V-240V	HP	1.5

Maximum UL/CSA horsepower ratings three-phase, 3-pole			
---	--	--	--


200V-208V	HP	3
220V-240V	HP	3
440V-480V	HP	7.5
550V-600V	HP	10

Mechanical features


Terminals type	Clamp screw
----------------	-------------

Weight	g	380
--------	---	-----

Dimensions

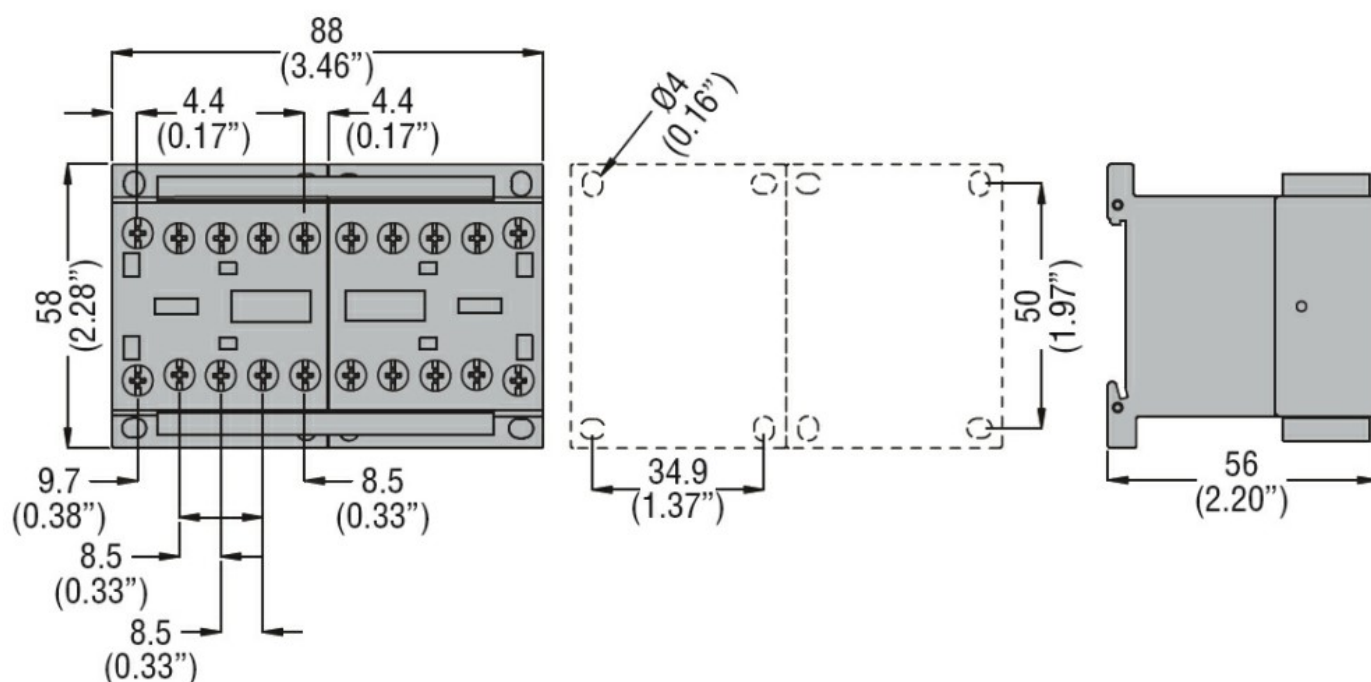

Wiring diagrams

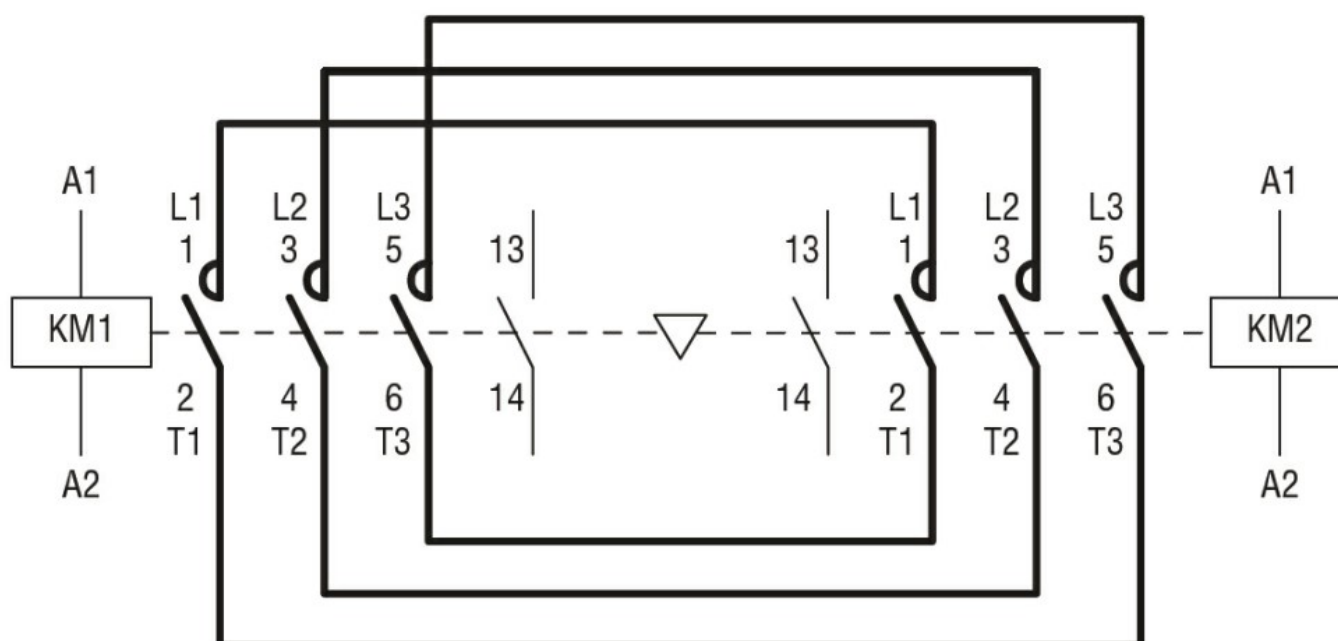

Certifications and compliance

Compliance

IEC/EN 60947-1
IEC/EN 60947-4-1
UL508 CSA C22.2 n° 14

Certificates

cULus

ETIM classification

ETIM 8.0

EC001037 -
Motor
starter/Motor
starter
combination

