



Electrical features

Maximum operating current ($\leq 440V$) A 12

Contact characteristics

Operational current Ie AC-3 ($\leq 440V \leq 55^{\circ}C$) A 12

Rated operational power AC-3 ($T \leq 55^{\circ}C$)	Voltage	Power (kW)
	230V	3.2
	400V	5.7
	415V	6.2
	440V	5.5
	500V	5
	690V	5

Built-in auxiliary contacts

NO	1
NC	0

UL technical data

Maximum UL/CSA horsepower ratings single-phase	Voltage	HP
	110V-120V	0.5
	220V-240V	1.5


Maximum UL/CSA horsepower ratings three-phase, 3-pole	Voltage	HP
	200V-208V	3
	220V-240V	3
	440V-480V	7.5
	550V-600V	10

Mechanical features


Terminals type Clamp screw

Weight g 445

Dimensions

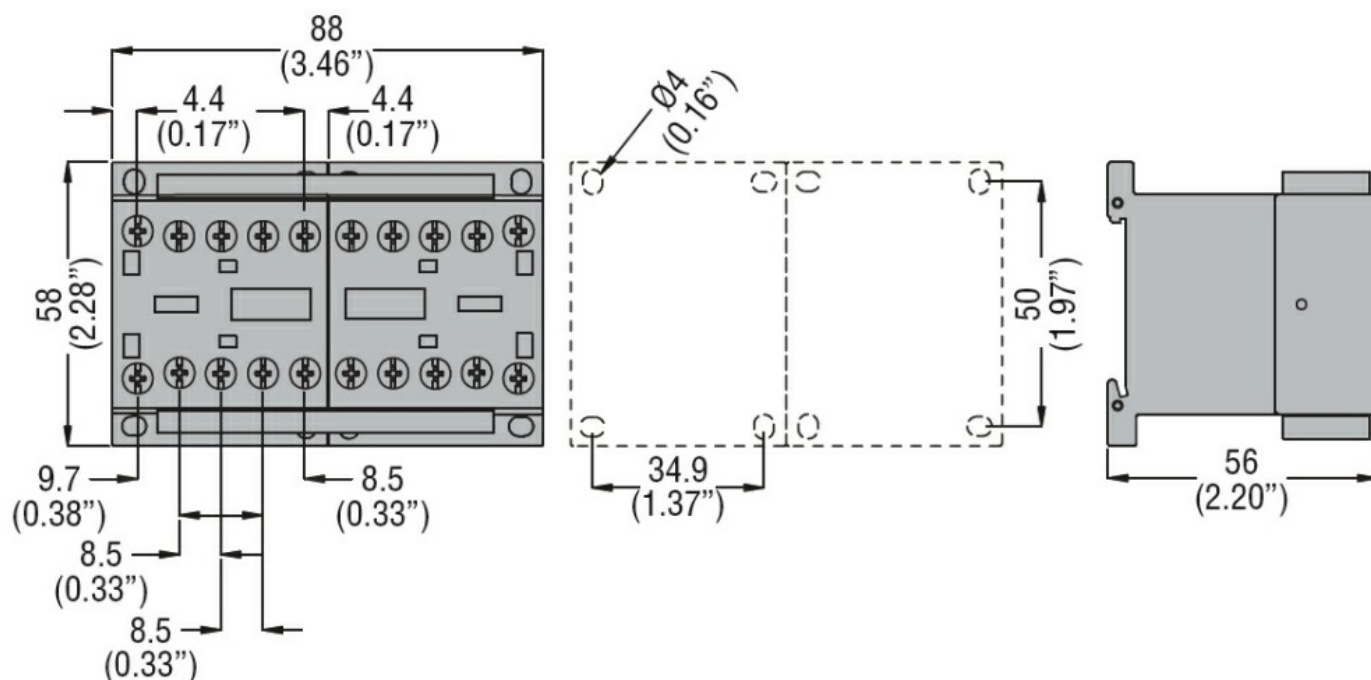

Wiring diagrams

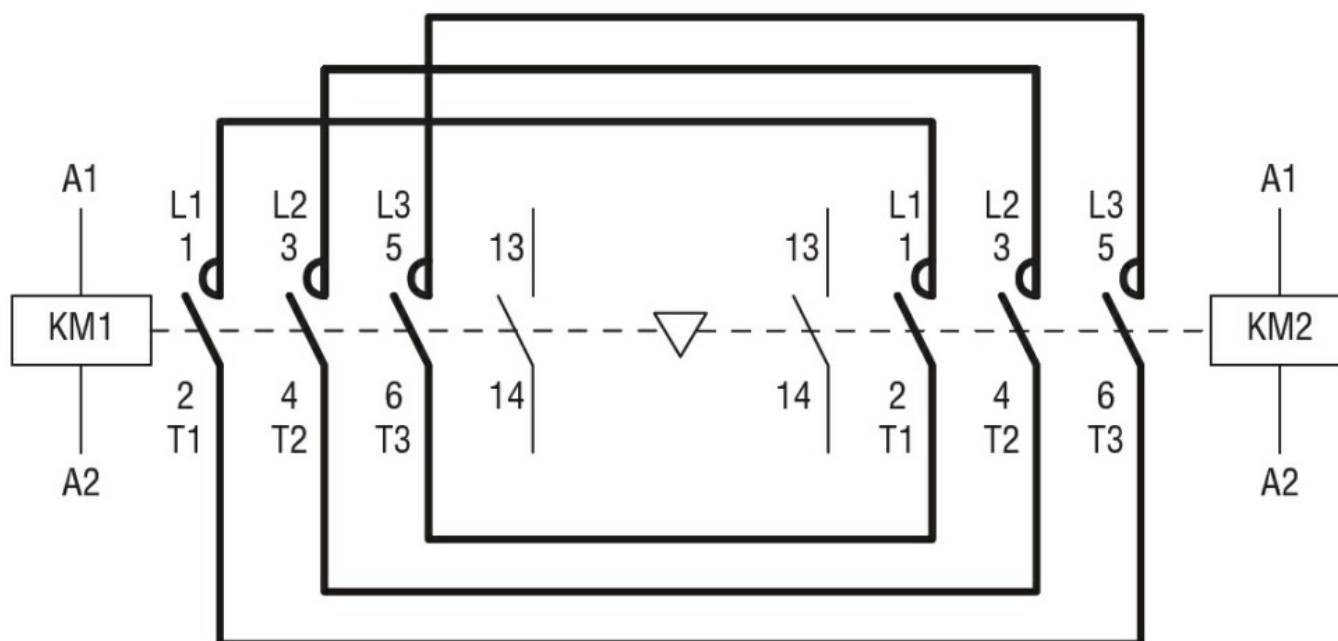

Certifications and compliance

Compliance

IEC/EN 60947-1
IEC/EN 60947-4-1
UL508 CSA C22.2 n° 14

Certificates

cULus

ETIM classification

ETIM 8.0

EC001037 -
Motor
starter/Motor
starter
combination

