



Contact characteristics

Tightening torque for terminals

min	Ibin	9
max	Ibin	9

Tightening torque for coil terminal

min	Ibin	9
max	Ibin	9


Safety related data

Mirror contats according to IEC/EN 609474-4-1 annex F	Yes
Mechanically linked contats according to IEC/EN 609474-5-1 annex L	Yes


UL technical data

Rated operational voltage AC (UL)	V	600
-----------------------------------	---	-----

Dimensions

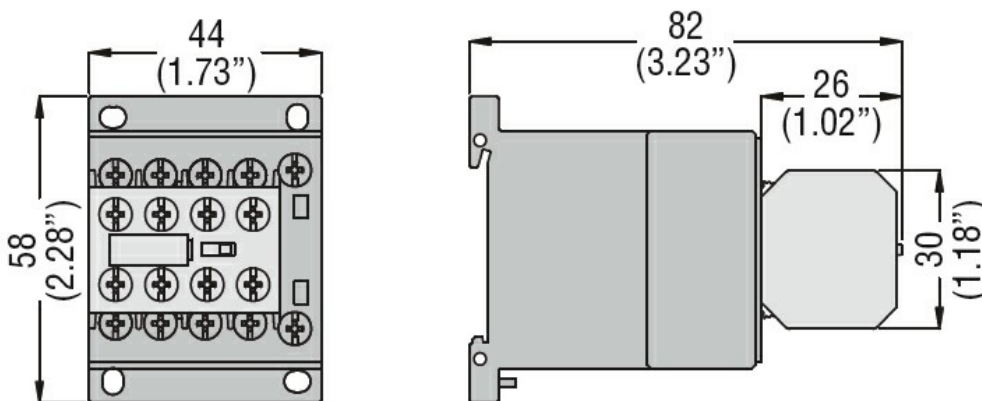

Wiring diagrams

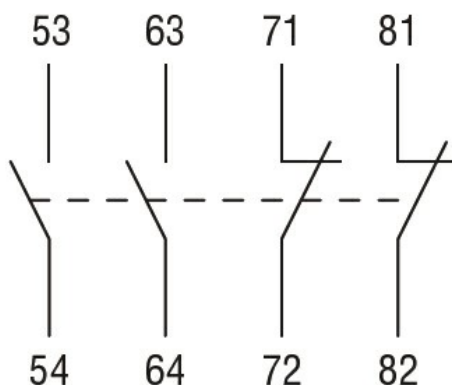

Certifications and compliance

Compliance

- CSA C22.2 n° 60947-1
- CSA C22.2 n° 60947-5-1
- IEC/EN 60947-1
- IEC/EN 60947-5-1
- UL 60947-1

UL 60947-5-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000041 -
Auxiliary contact
block