



Auxiliary contact characteristics

Rated insulation voltage Ui IEC/EN	V	690
Rated impulse withstand voltage Uimp	kV	4

Operational characteristics

IEC maximum current (Imax)	A	63
----------------------------	---	----

Mechanical features

Tightening torque for terminals	min	Nm	2.5
	max	Nm	3


Conductor section	AWG/Kcmil	min	10
		max	4

Flexible c/w lug conductor section	min	mm ²	4
	max	mm ²	25

Terminals	tool	Ph2
-----------	------	-----

Weight	g	48
--------	---	----

Dimensions

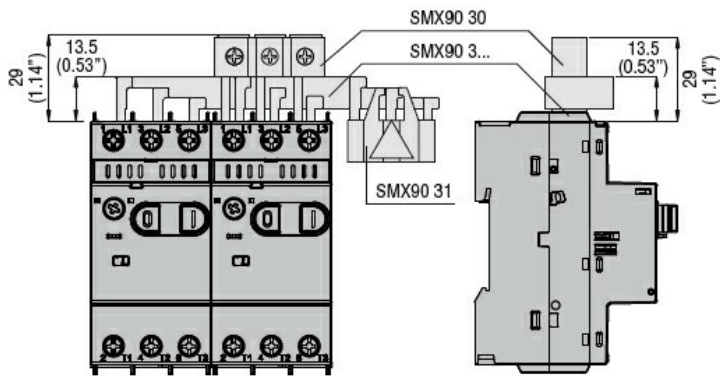

Certifications and compliance

Compliance	IEC/EN 60947-1
	IEC/EN 60947-5-1

Certificates	EAC
--------------	-----

ETIM classification