
11SMX9035

THREE-PHASE CONNECTION BUSBAR 45MM. FOR 5 BREAKERS. FOR SM1…



Auxiliary contact characteristics		
Rated insulation voltage Ui IEC/EN	V	690
Rated impulse withstand voltage Uimp	kV	4
Operational characteristics		
IEC maximum current (Imax)	A	63
Mechanical features		
Weight	g	92

Dimensions

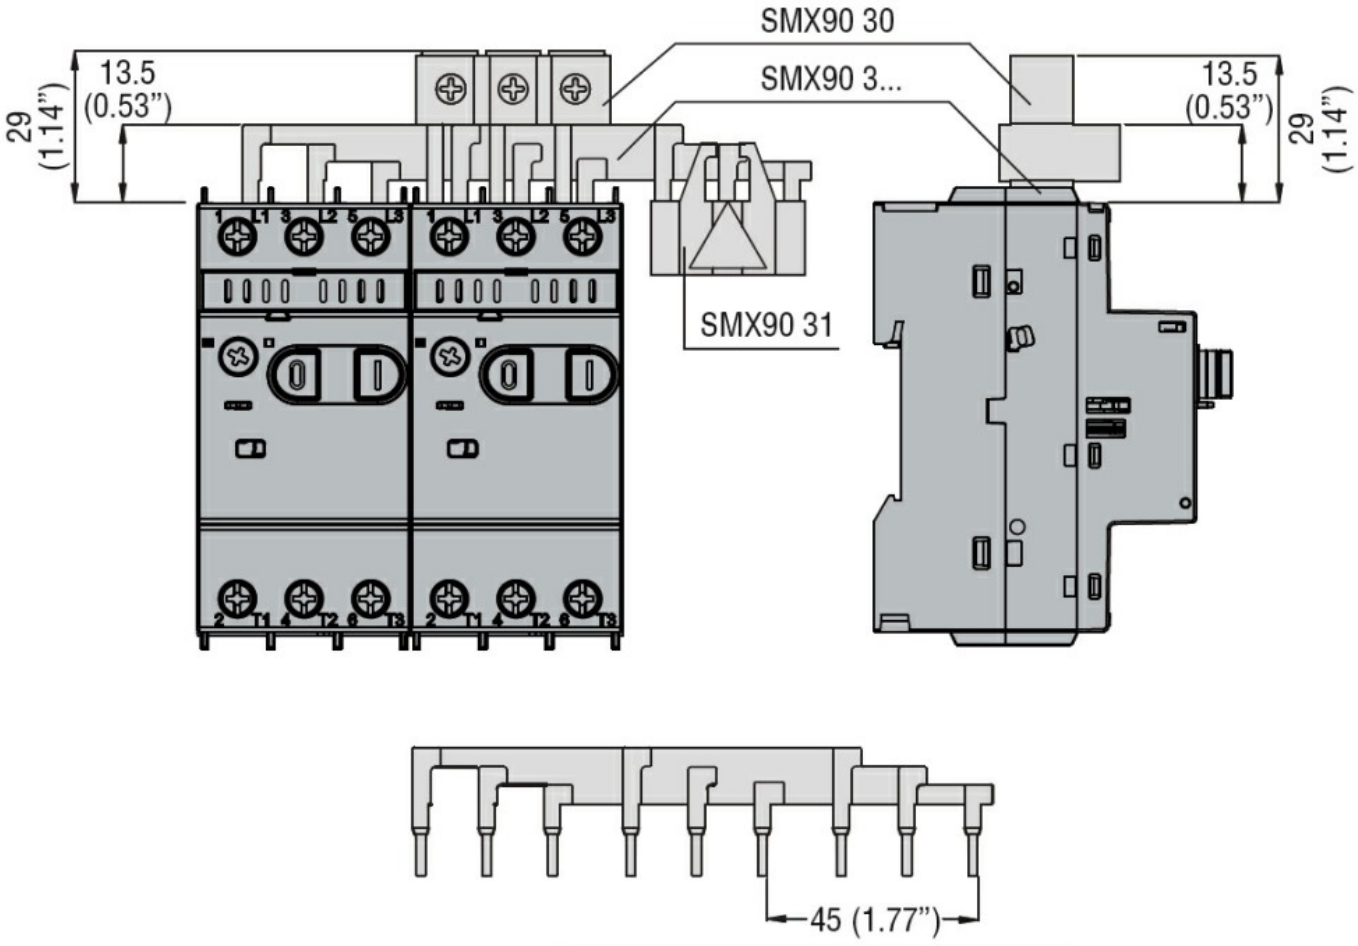

Certifications and compliance

Compliance	
	CSA C22.2 n° 14
	IEC/EN 60947-1
	IEC/EN 60947-5-1
	UL60947-1
	UL60947-4-1
Certificates	
	cULus
	EAC

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

ETIM classification

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding