



#### Auxiliary contact characteristics

|                                           |    |     |
|-------------------------------------------|----|-----|
| Rated insulation voltage $U_i$ IEC/EN     | V  | 690 |
| Rated impulse withstand voltage $U_{imp}$ | kV | 4   |


#### Operational characteristics

|                                   |   |    |
|-----------------------------------|---|----|
| IEC maximum current ( $I_{max}$ ) | A | 63 |
|-----------------------------------|---|----|

#### Mechanical features

|        |   |    |
|--------|---|----|
| Weight | g | 90 |
|--------|---|----|

#### Dimensions

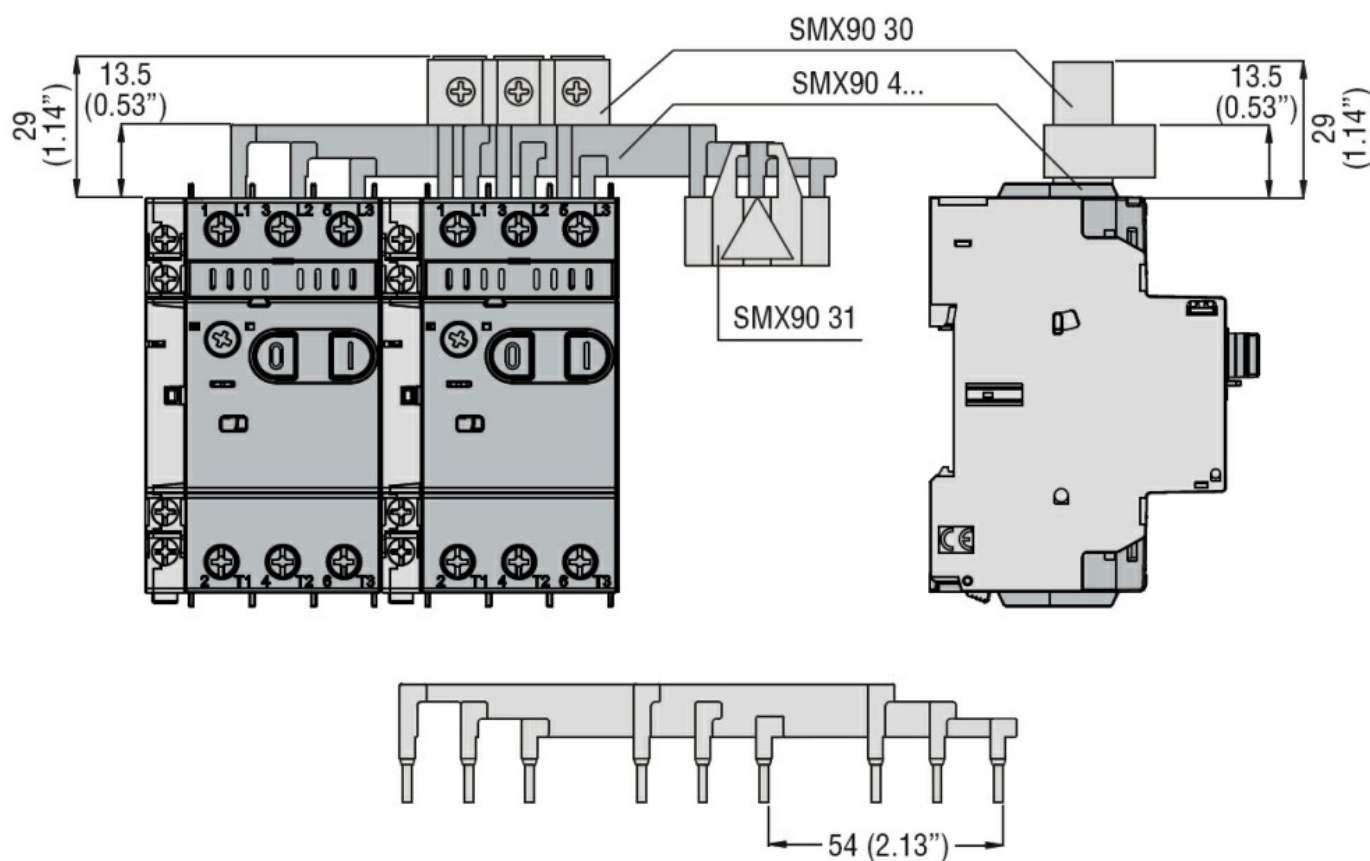

#### Certifications and compliance

##### Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL60947-1

UL60947-4-1

##### Certificates

cULus

EAC

#### ETIM classification