



Connections

Terminals type Screw

Conductor cross section

IEC Max mm² 2.5

Ambient conditions


Temperature

Operating temperature max °C +60

Housing

Weight g 50

Dimensions

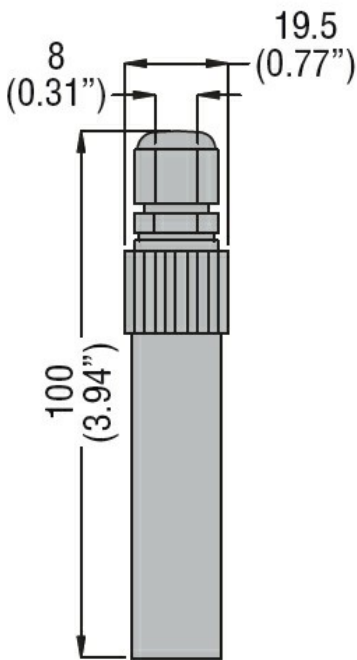

Certifications and compliance

Compliance

/

Certificates

EAC

ETIM classification

ETIM 8.0 EC001447 - (Fill)
level monitoring
relay