



Relay outputs

Contact ratings	10A - 400VAC
-----------------	--------------

Connections

Terminals type	Screw
----------------	-------

Tightening torque for terminals	max	Nm	0.8
	max	lbin	7.1

Conductor cross section	AWG/Kcmil	Max	AWG	2 x 14
	IEC	Max	mm²	2 x 2.5


Housing

Mounting	on 35mm DIN rail or Plug-in housing
----------	---

Dimensions (W x H x D)	mm	38 x 65 x 27
------------------------	----	--------------

Weight	g	64
--------	---	----

Dimensions

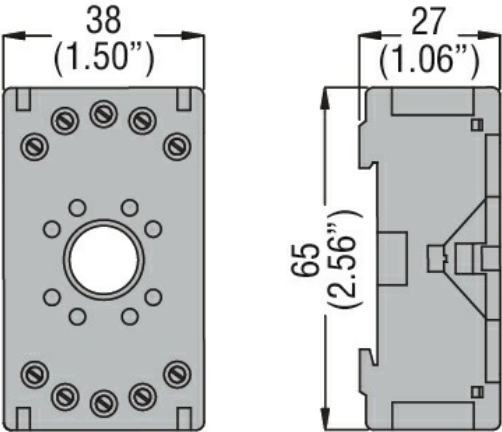

Certifications and compliance

Compliance	/
------------	---

Certificates	EAC
--------------	-----

ETIM classification

ETIM 8.0	EC001456 - Relay socket
----------	----------------------------