




Relay outputs			
Contact ratings	10A - 400VAC		
Connections			
Terminals type	Screw		
Tightening torque for terminals	max	Nm	0.8
	max	lbin	7.1
Conductor cross section			
AWG/Kcmil	Max	AWG	2 x 14
IEC	Max	mm²	2 x 2.5
Housing			
Mounting	on 35mm DIN rail or Plug-in housing		
Dimensions (W x H x D)	mm	38 x 65 x 27	
Weight	g	61	
Dimensions			

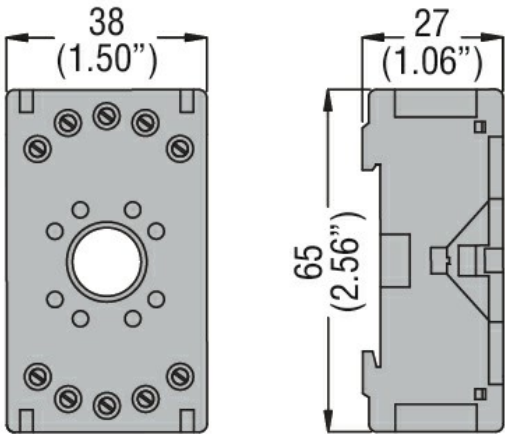

Certifications and compliance	
Compliance	/
Certificates	EAC
ETIM classification	
ETIM 8.0	EC001456 - Relay socket