

General characteristics

Switching diagram	52 - Changeover switch 2 poles
N° of elements	2
Mounting form	U11 - Front mounting with black handle without front plate for hole diam. 22mm fixing

Contact characteristics

Rated insulation voltage U_i	IEC/EN	V	690
	UL/CSA	V	600
Rated impulse withstand voltage U_{imp}		kV	6
Conventional free air thermal current I_{th}	IEC/EN	A	25
	UL/CSA	A	30
Rated operational voltage		V	480
Rated operational impulse voltage		kV	4
Maximum fuse size for short-circuit protection I_n (gG)			
	10kA	A	25
	15kA	A	25
	25kA	A	25
Rated short time current I_{cw}			
	1s	kA	400
Conductivity			10/5 mA/V
Operational current I_e IEC/EN	AC1/AC21A		
		A	25
	AC15	110V	A 16
		220/230V	A 12
		380/400V	A 8
		660/690V	A 2
	Three-phase AC-3	220/230V	kW 5.5
		380/440V	kW 7.5
		500/690V	kW 7.5
	Single-phase AC-3	110V	kW 1.5
		220/230V	kW 3
		380/440V	kW 5.5
	Three-phase AC23A	220/230V	kW 6.5
		380/440V	kW 11
		500/690V	kW 11
	Single-phase AC23A	110V	kW 1.5
		220/230V	kW 3.7
		380/440V	kW 5.5
Rated operational current in DC			
	DC21A		


ROTARY CAM SWITCH 7GN SERIES, CHANGEOVER SWITCH 2 POLES 25A, FOR FRONT MOUNTING WITH BLACK HANDLE WITHOUT FRONT PLATE FOR HOLE Ø22MM FIXING

		48V	A	25
		60V	A	25
		110V	A	4
		220V	A	0.7
DC23A (poles in series)				
		24V	A	25 (1)
		48V	A	25 (2)
		60V	A	25 (3)
		110V	A	12 (3)
		220V	A	10 (4)
DC13				
		24V	A	25
		48V	A	20
		60V	A	16
		110V	A	1.5
		220V	A	0.4
Power dissipation			W	1.1
Mechanical features				
Terminals screw				M3.5
Tightening torque for terminals max			Nm	0.8
Conductor size				
AWG - Rigid cable				
	min	AWG		20
	Max	AWG		10
AWG - Flexible cable				
	min	AWG		20
	Max	AWG		12
Conductor size (IEC) - Flexible cable				
	min	mm ²		0.5
	Max	mm ²		4
Conductor size (IEC) - Rigid cable				
	min	mm ²		0.5
	Max	mm ²		4
Mechanical life			cycles	5x10 ⁶
UL technical data				
Motor power for direct-on-line control				
for three-phase motor				
	120V	HP		3
	240V	HP		5
	480V	HP		10
	600V	HP		15
for single-phase motor				
	120V	HP		1.5
	240V	HP		3
Ambient conditions				
Temperature				
Operating temperature				
	min	°C		-25
	max	°C		+55
Storage temperature				
	min	°C		-40
	max	°C		+70
Resistance & Protection				
Frontal IP degree				IP40

Terminals IP degree


IP00

Dimensions

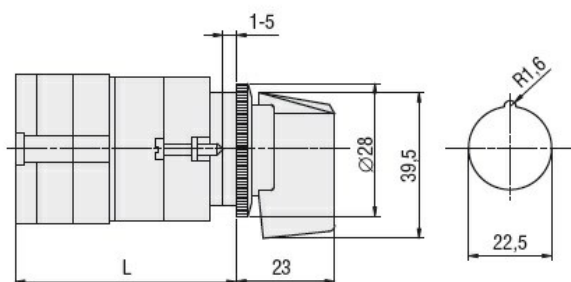

Series	L			
	1	2	3...8	
7GN12	47	56.7	66.4	114.9
7GN20	47	56.7	66.4	114.9
7GN25	51.4	65	78.6	146.6

Wiring diagrams

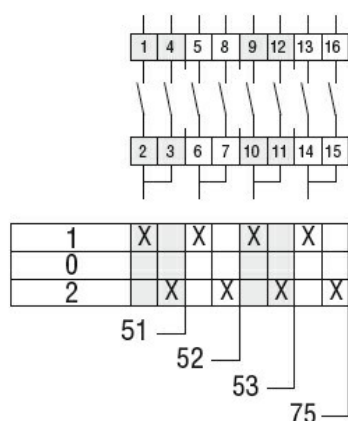

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

UL60947-4-1

Certificates

cCSAus

EAC

UL

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete