



#### General characteristics

|                          |           |           |
|--------------------------|-----------|-----------|
| Diameter                 | mm - inch | 62 / 2.44 |
| Colour                   |           | Blue      |
| IEC degree of protection |           | IP54      |


#### Mechanical features

|                                     |     |                       |
|-------------------------------------|-----|-----------------------|
| Tightening torque for terminals max | Nm  | 0.5                   |
| Terminals screw                     |     | Screw clamp terminals |
| Conductor section                   |     |                       |
| AWG/Kcmil                           | max | 16                    |
| IEC                                 | max | mm <sup>2</sup> 1.5   |
| Weight                              | g   | 60                    |


#### Ambient conditions

|             |                       |    |     |  |
|-------------|-----------------------|----|-----|--|
| Temperature | Operating temperature |    |     |  |
|             | min                   | °C | -20 |  |
|             | max                   | °C | +50 |  |

#### Dimensions

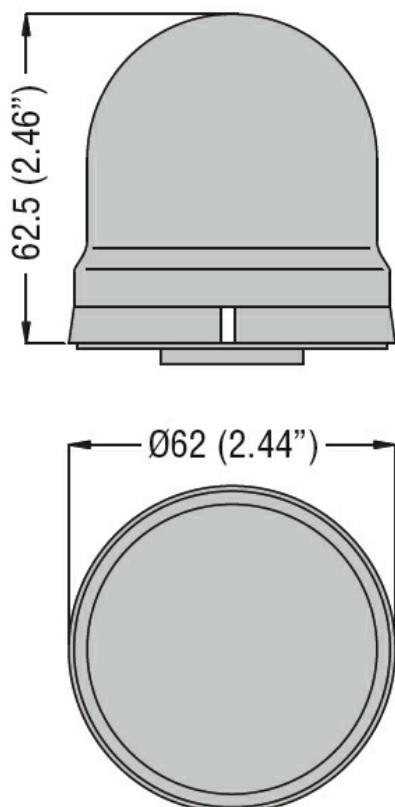

#### Wiring diagrams

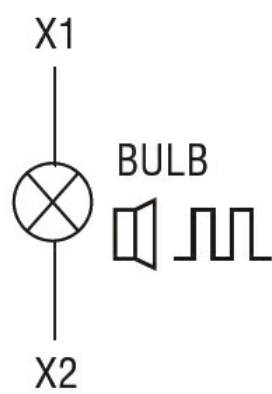

Certifications and compliance

Compliance

|                  |
|------------------|
| IEC/EN 60947-1   |
| IEC/EN 60947-5-1 |

Certificates

EAC

ETIM classification

ETIM 8.0

EC000232 -  
Optical module  
for signal tower