



#### General characteristics

|                          |           |           |
|--------------------------|-----------|-----------|
| Diameter                 | mm - inch | 62 / 2.44 |
| Supply voltage (AC)      | V         | 24...230  |
| Colour                   |           | Red       |
| IEC degree of protection |           | IP54      |


#### Mechanical features

|                                     |     |                       |
|-------------------------------------|-----|-----------------------|
| Tightening torque for terminals max | Nm  | 0.5                   |
| Terminals screw                     |     | Screw clamp terminals |
| Conductor section                   |     |                       |
| AWG/Kcmil                           | max | 16                    |
| IEC                                 | max | mm <sup>2</sup> 1.5   |
| Weight                              | g   | 60                    |


#### Ambient conditions

|             |                       |    |     |  |
|-------------|-----------------------|----|-----|--|
| Temperature | Operating temperature |    |     |  |
|             | min                   | °C | -20 |  |
|             | max                   | °C | +50 |  |

#### Dimensions

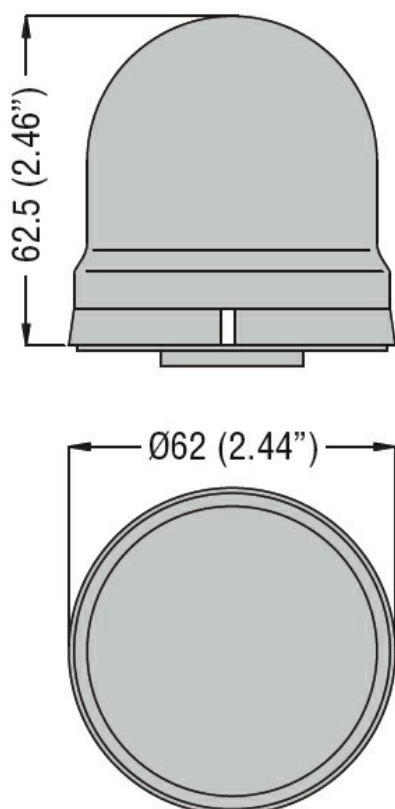

## Wiring diagrams

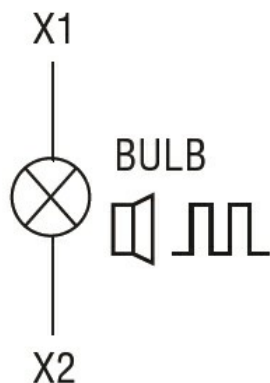

## Certifications and compliance

### Compliance

IEC/EN 60947-1

IEC/EN 60947-5-1

### Certificates

EAC

## ETIM classification

ETIM 8.0

EC000232 -  
 Optical module  
 for signal tower