





General characteristics				
Diameter		mm - inch		70 / 2.75
Colour		Black		
IEC degree of protection		IP65		
Mechanical features				
Tightening torque for terminals max		Nm		0.5
Terminals screw		Screw clamp terminals		
Conductor section				
	AWG/Kcmil			
		max	16	
	IEC			
		max	mm ²	1.5
Weight		g		120
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-20
		max	°C	+50
Dimensions				

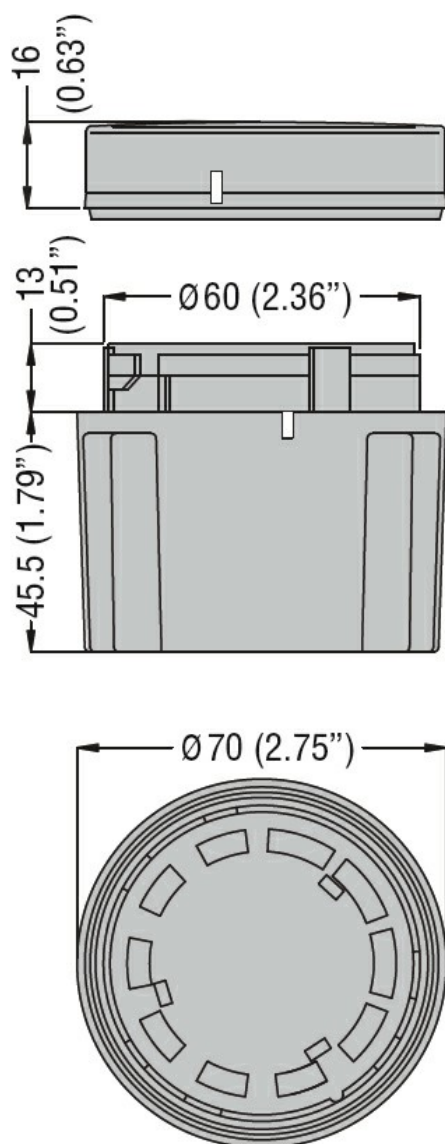

Wiring diagrams

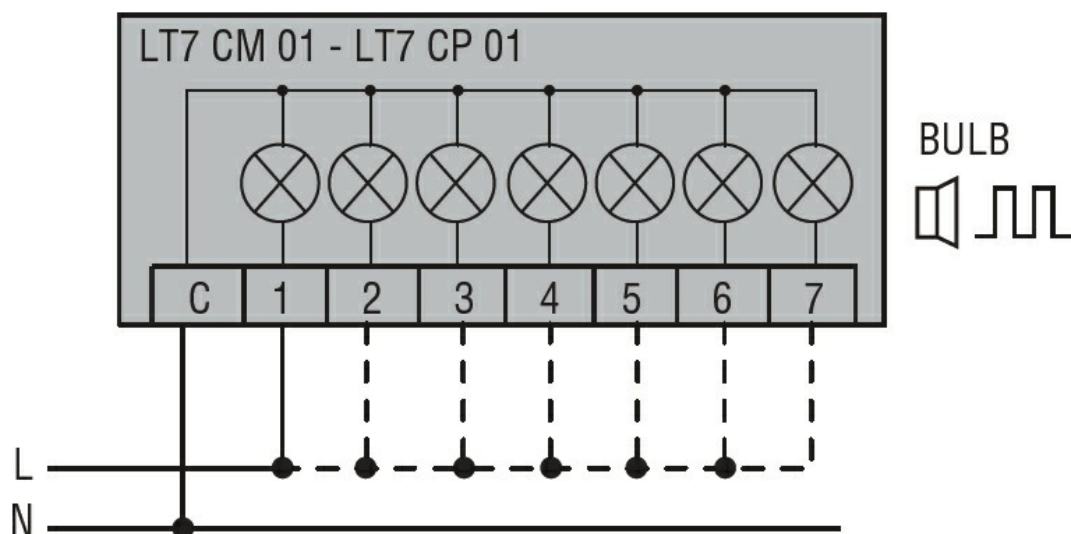

Connect terminals C and 1 as indicated to power the first module. If other modules are fitted, the respective terminals must be connected accordingly.

Certifications and compliance

Compliance

CSA C22.2 n°14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification

ETIM 8.0

EC001152 -
Connection
module for signal
tower