



#### General characteristics

|                          |           |           |
|--------------------------|-----------|-----------|
| Diameter                 | mm - inch | 70 / 2.75 |
| Colour                   |           | Red       |
| IEC degree of protection |           | IP65      |


#### Mechanical features

|        |   |    |
|--------|---|----|
| Weight | g | 82 |
|--------|---|----|


#### Ambient conditions

|             |                       |     |    |     |
|-------------|-----------------------|-----|----|-----|
| Temperature | Operating temperature |     |    |     |
|             |                       | min | °C | -20 |
|             |                       | max | °C | +50 |

#### Dimensions

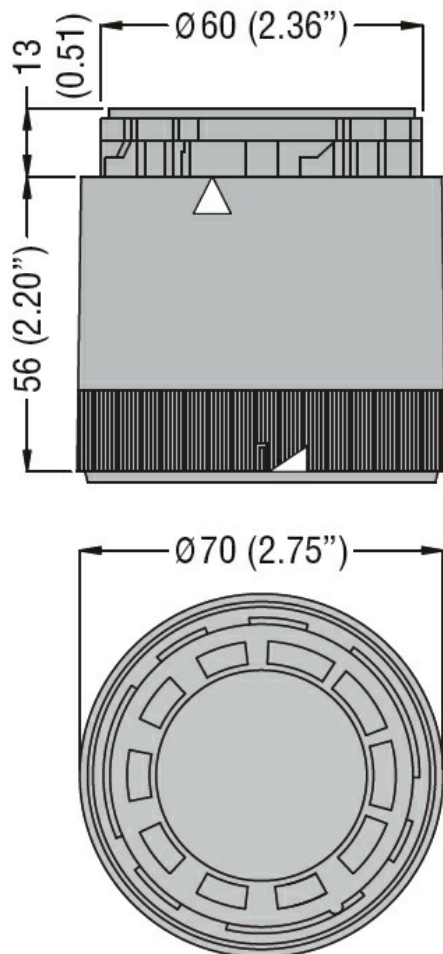

#### Wiring diagrams

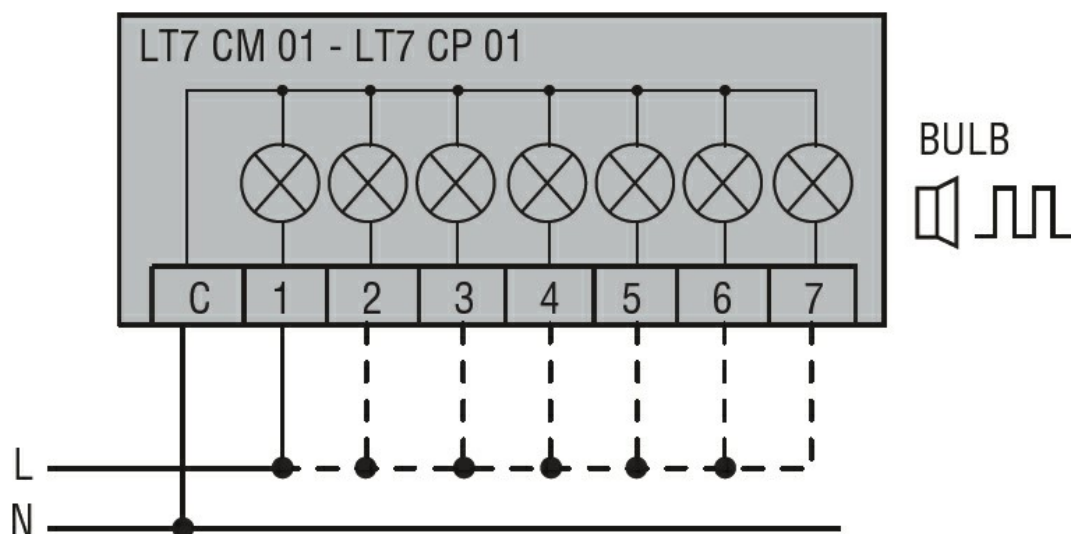

Connect terminals C and 1 as indicated to power the first module.  
If other modules are fitted, the respective terminals must be  
connected accordingly.

#### Certifications and compliance

##### Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

##### Certificates

cULus

EAC

#### ETIM classification

ETIM 8.0

EC000232 -  
Optical module  
for signal tower