



Electrical features

Supplies voltage

Type of system	Three phase
Rated supply voltage	208...600VAC
auxiliary supply voltage (Us)	24VAC/DC
Rated frequency	50/60
Rated starter current Ie	25
Rated motor power in-line	
IEC ratings (T≤40°C)	
230VAC	5.5
400VAC	11
500VAC	15
UL ratings (T≤40°C)	
220-240VAC	7.5
380-415VAC	10
440-480VAC	15
550-600VAC	20
Number of controlled phases	2
Built-in bypass	Yes
Cooling System	Natural or forced (optional)
Rated insulation voltage Ui	600

Programming interface

Potentiometer	Settings: starting voltage, acceleration ramp, deceleration ramp. Note. Potentiometers can be disabled via NFC.
Display	No
Programming with NFC technology	Yes
Optical port	Yes

Startup and stop settings

Startup method	Voltage ramp with current limit
Stop method	Voltage ramp or free-wheel stop
Acceleration ramp	1-20
Deceleration ramp	0-20
Startup voltage	30-80

Protections

Power supply Protection	No power line, phase loss, frequency out of limits, minimum and maximum voltage and phase sequence
Motor protection	Electronic current thermal protection (overload), locked rotor, current asymmetry, load too low, starting too long
Starter protection	Overtemperature and overcurrent

Functions	
Built-in bypass	Yes
Built-in display and keypad	No
Languages	No
View measurements	No
Torque control	No
Adjustable current limit	Yes
Dynamic braking	No
Kick Start function	No
Motor overload electronic protection	Yes
Motor protection PTC input	No
Protection against phase loss	Yes
Protection against phase inversion	Yes
Protection against locked rotor	Yes
Protection against thyristor overtemperature	Yes
Protection against low load	Yes
Programmable alarm	Yes
Digital inputs	1
Analog inputs	0
Digital outputs	2
Analog output	0
Monitoring communication	No
Optical port for programming	Yes
Event log	No
Motor hour counter	No
Startup counter	No
Clock calendar	No
Remote external keypad	Yes

Input and Output			
Digital inputs			
	Number of digital input	Nr.	1
	Digital input type		Volt-free contact
	Digital input functions		Motor start
Digital outputs			
	Number of digital output	Nr.	2

Digital output arrangement

2 NO contacts
with the same
common, 5A
250VAC AC1 -
5A 30 VDC

Digital output functions

Programmable:
line contactor
(Run), TOR (Top
Of Ramp), alarm,
max torque

Communication interfaces

Communication interface

NFC, optical port
for the
connection of
USB (CX01) and
Wi-Fi (CX02)
devices, optional
RS485 module
(CX04) Modbus
RTU protocol

Ambient conditions

Temperature

Operating temperature

min	°C	-20
max	°C	+60°C (with current derating >40°C)

Storage temperature

min	°C	-30
max	°C	+80

Max altitude

m	1000 without derating of the starter current
---	--

Relative humidity

%	<80%
---	------

Pollution degree

	2
--	---

Installation category

	III
--	-----

Housing

Mounting

Screw-fixing or
35mm DIN rail
(IEC/EN/BS
60715)

IP degree of protection

	IP20
--	------


Dimensions (W x H x D)

mm	45 x 159 x 128.4
----	------------------

Weight

Kg	0.66
----	------

Dimensions

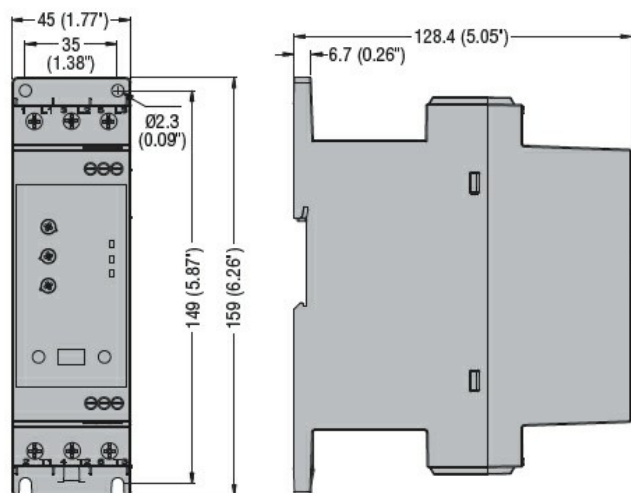

Certifications and compliance

Compliance

CSA C22.2 n° 60947-4-2

IEC/EN/BS 60947-1

IEC/EN/BS 60947-4-2

UL 60947-4-2

Certificates

cULus

EAC

RCM (pending)

ETIM classification

ETIM 8.0

EC000640 - Soft
starter