



Electrical features

Supplies voltage

Type of system	Three phase
Rated supply voltage	380...690VAC
auxiliary supply voltage (Us)	24VAC/DC
Rated frequency	50/60
Rated starter current Ie	34

Rated motor power in-line

IEC ratings (T≤40°C)

400VAC	kW	18.5
500VAC	KW	22
690VAC	KW	30

UL ratings (T≤40°C)

380-415VAC	HP	20
440-480VAC	HP	25
550-600VAC	HP	30

Rated motor power inside delta

IEC ratings (T≤40°C)

400VAC	kW	22
500VAC	KW	30
690VAC	KW	45

UL ratings (T≤40°C)

380-415VAC	HP	30
440-480VAC	HP	30
550-600VAC	HP	40

Number of controlled phases	Nr.	3
Built-in bypass		Yes
Cooling System		Forced
Rated insulation voltage Ui	V	690

Programming interface

Display	LCD graphic display
Programming with NFC technology	No
Optical port	No

Startup and stop settings

Startup method	Constant current, current ramp, voltage ramp, adaptive control
Stop method	Voltage ramp, adaptive control, free-wheel stop, DC braking, soft stop with braking contactor

Protections

Auxiliary supply protection	Voltage too low
Power supply Protection	No power, phase loss, phase sequence, frequency out of limits, voltage out of limits
Motor protection	Overload, locked rotor, current asymmetry, current too low, power too low, overtemperature, starting too long
Starter protection	Overcurrent, overtemperature, phase shorted

Functions

Built-in bypass	Yes
Built-in display and keypad	Yes
Languages	6
View measurements	Yes
Torque control	No
Adjustable current limit	Yes
Dynamic braking	Yes
Kick Start function	Yes
Motor overload electronic protection	Yes
Motor protection PTC input	Thermistor input
Protection against phase loss	Yes
Protection against phase inversion	Yes
Protection against locked rotor	Yes
Protection against thyristor overtemperature	Yes
Protection against low load	Yes
Programmable alarm	Yes
Digital inputs	4
Analog inputs	0
Digital outputs	3
Analog output	1
Optical port for programming	No
Event log	Yes
Motor hour counter	Yes
Startup counter	Yes
Clock calendar	Yes
Remote external keypad	Yes

Input and Output

Digital inputs	Number of digital input	Nr.	4
	Digital input type		4 input with dry contact + 1 thermistor input
	Digital input functions		1x Start/Stop, 1x Reset and 2 Programmable
Digital outputs			

SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 24VAC/DC. RATED OPERATIONAL VOLTAGE 380...690VAC, 34A

Number of digital output	Nr.	3
Digital output arrangement		2x 1NO + 1x C/O 1NO Line contactor + 1NO Programmable + 1C/O Programmable
Digital output functions		

Ambient conditions

Temperature

Operating temperature

min	°C	-10
max	°C	+60°C (with current derating >40°C)

Storage temperature


min	°C	-25
max	°C	+60

Max altitude	m	1000 without derating
Relative humidity	%	<95%
Pollution degree		3

Housing

Mounting		Screw-fixing
IP degree of protection		IP20
Dimensions (W x H x D)	mm	152x336x233
Weight	Kg	4.8

Dimensions

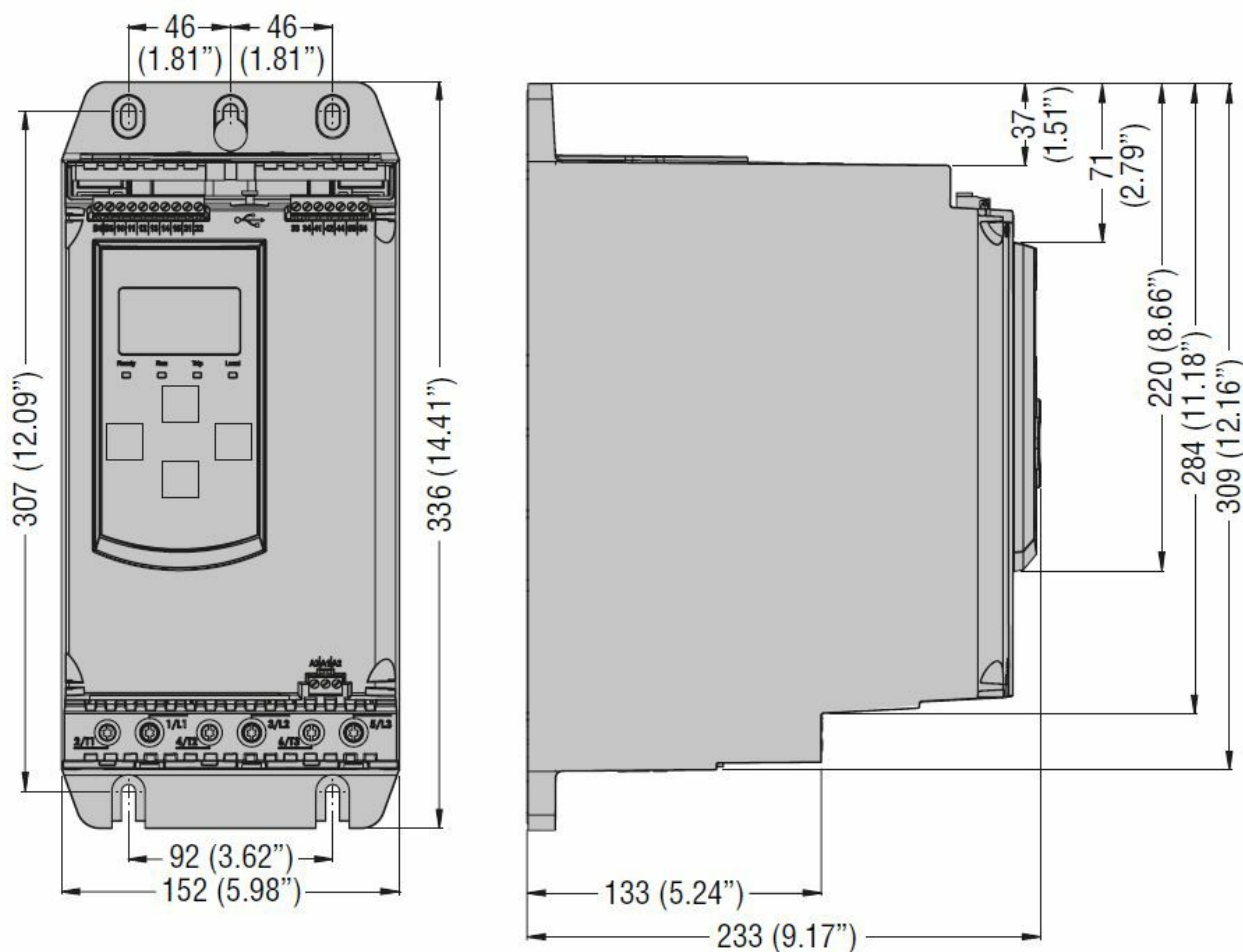

Certifications and compliance

Compliance

CSA C22.2 n°60947-4-2

IEC/EN/BS 60947-4-2

UL 60947-4-2

Certificates

cULus

RCM

ETIM classification

ETIM 8.0

EC000640 - Soft
starter