



Electrical features

Maximum operating current ($\leq 440V$) A 56


Contact characteristics

Operational current Ie			
	AC-1 ($\leq 40^{\circ}C$)	A	56
	AC-1 ($\leq 55^{\circ}C$)	A	45
	AC-1 ($\leq 60^{\circ}C$)	A	40


Mechanical features

Terminals type	Screw
Fixing	Side mount
Weight	g 1068

Dimensions

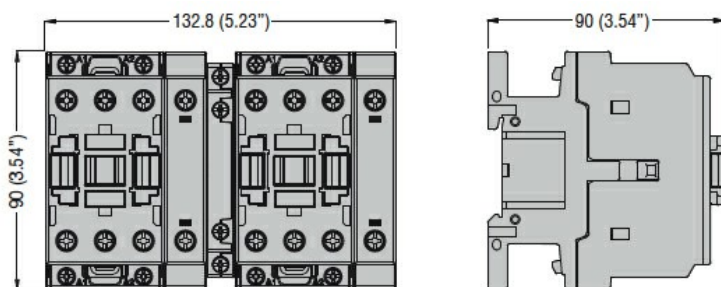

Wiring diagrams

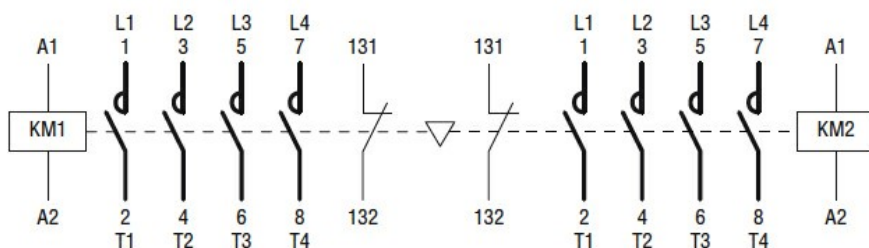

ETIM classification

ETIM 8.0

EC000010 -
Combination of
contactors