



Contact characteristics

IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$ A 55

Mechanical features

Weight g 151

UL technical data



Rated operational voltage AC (UL) V 600

General USE


Contactor

AC current A 54

Dimensions

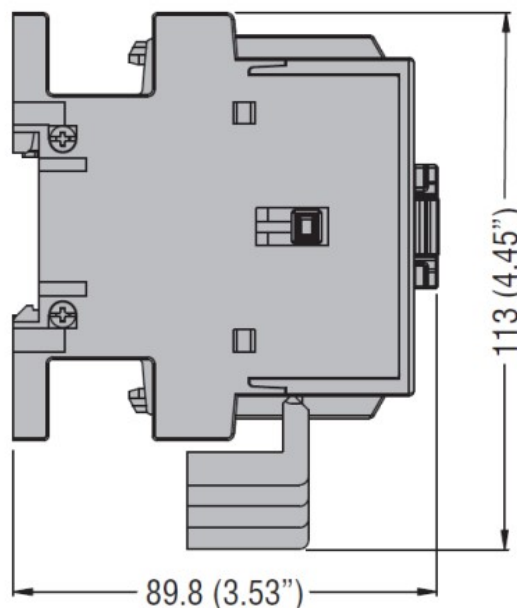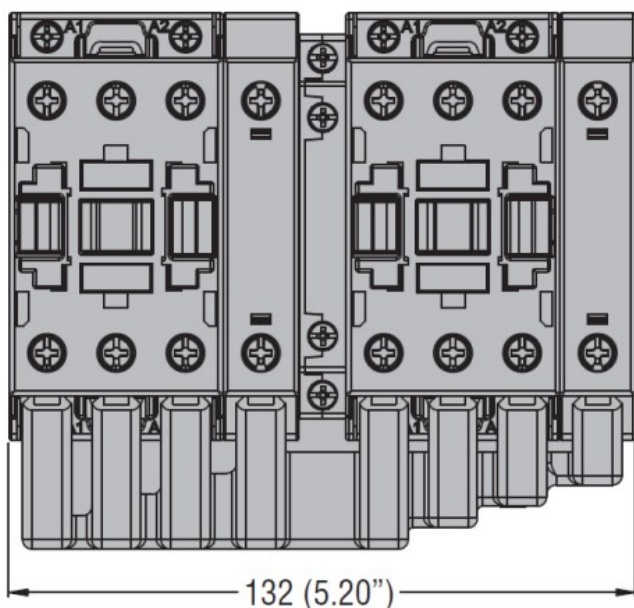

Wiring diagrams

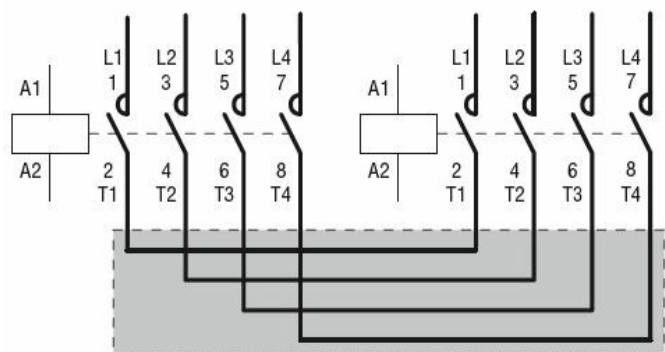

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN/BS 60947-1

IEC/EN/BS 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

cULus

ETIM classification

ETIM 8.0

EC002498 -
Accessories/spare
parts for low-
voltage switch
technology