



**Mechanical features**

Weight g 2

**AC coil operating**

Rated AC voltage at 50/60Hz V 48

AC operating voltage			
of 50/60Hz coil powered at 50Hz drop-out	min	%Us	20
	max	%Us	55
of 50/60Hz coil powered at 60Hz pick-up	min	%Us	85
	max	%Us	110
drop-out	min	%Us	20
	max	%Us	55


AC average coil consumption at 20°C			
of 50/60Hz coil powered at 50Hz	in-rush	VA	75
	holding	VA	9
of 50/60Hz coil powered at 60Hz	in-rush	VA	70
	holding	VA	6.5
of 60Hz coil powered at 60Hz	in-rush	VA	75
	holding	VA	9

Dissipation at holding ≤20°C 50Hz W 2.5

**UL technical data**

Rated operational voltage AC (UL) V 600

**Dimensions**

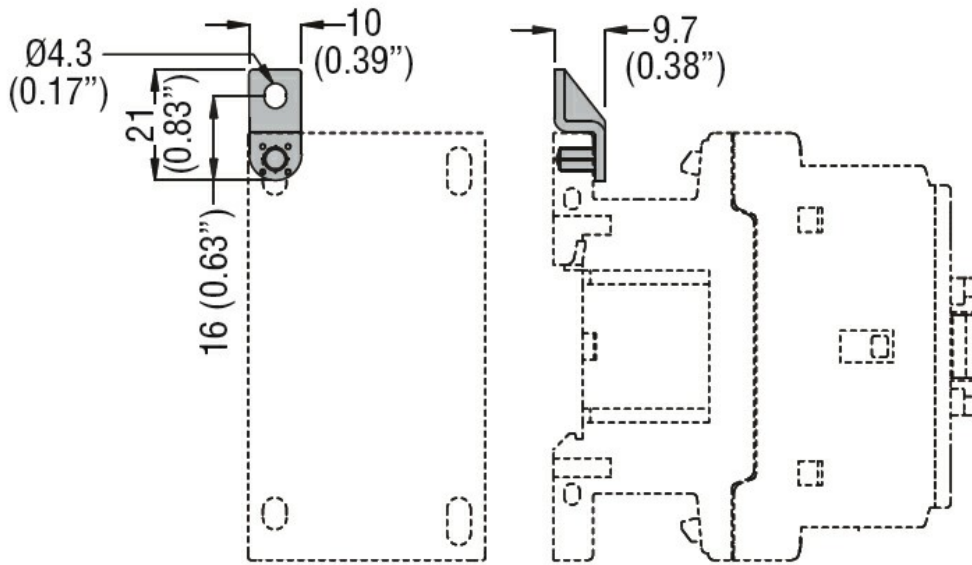

### Certifications and compliance

Certificates

/

### ETIM classification

ETIM 8.0

EC002498 -  
Accessories/spare  
parts for low-  
voltage switch  
technology