



Electrical features

IEC Conventional free air thermal current $I_{th} \leq 40^{\circ}\text{C}$	A	20
Operational current AC1 and AC-7a $\leq 400\text{V}$	A	20
Operational current AC-3 and AC-7b $\leq 400\text{V}$	A	9
Rated insulation voltage U_i IEC/EN	V	440
Rated impulse withstand voltage U_{imp}	kV	4
Minimum switching capacity		$\geq 17\text{V} \geq 50\text{mA}$
Power dissipation per pole (average value) I_{th}	W	1.7

Control circuit

Auxiliary rated supply voltage U_s		220VAC/VDC
Auxiliary contacts		
	NO	Nr. 1
	NC	Nr. 1

Average coil consumption $\leq 20^{\circ}\text{C}$			
	in-rush	W	2.5
	holding	W	2.5

Operating voltage			
pick-up			
	min	% U_s	85
	max	% U_s	110
drop-out			
	min	% U_s	20
	max	% U_s	75

Operating times

Average time			
Closing NO			
	min	ms	15
	max	ms	45
Opening NO			
	min	ms	25
	max	ms	50

Operations

Mechanical life	cycles	3000000
Electrical life AC-3	cycles	300000
Electrical life AC1	cycles	200000

Ambient conditions

Operating temperature	min	°C	-15
	max	°C	55
Storage temperature	min	°C	-30
	max	°C	80
Max altitude		m	2000

Mechanical features

Fixing	DIN rail 35mm
--------	---------------

Tightening torque for coil terminal

max	Nm	0.6
max	Ibin	0.6

Tightening torque for terminals

max	Nm	1.2
max	Ibin	0.9

Conductor section

Coil terminal

min	mm ²	1
max	mm ²	2.5

Power terminal

min	mm ²	1
max	mm ²	10

Terminals tool

PZ2

Weight

g 135

Resistance & Protection


Frontal IP degree

IP20


Pollution degree

3

Dimensions

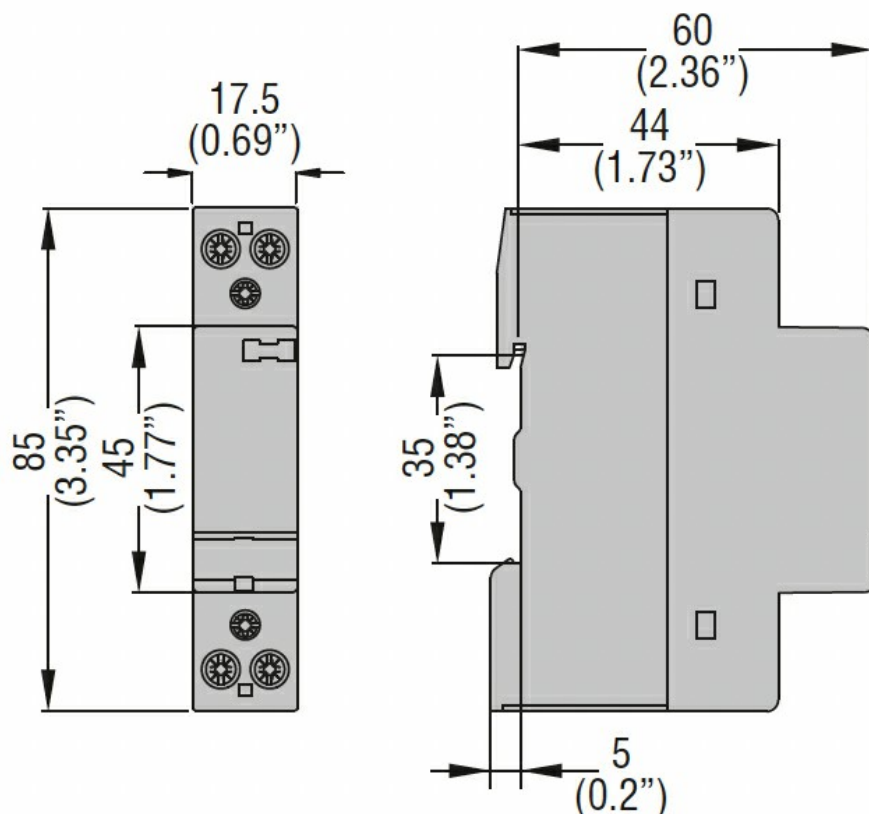

Wiring diagrams



Certifications and compliance

Compliance

IEC/EN 60947-1

IEC/EN 60947-4-1

IEC/EN 60947-5-1

IEC/EN 61095

Certificates

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching