



Auxiliary supply U_s

Auxiliary operating voltage range
AC

	Max	VAC	264
Operational frequency	min	Hz	45
	max	Hz	66
Rated frequency		Hz	50
Power consumption	Max	VA	1
Power dissipation Max		W	0.4

Measuring voltage inputs

Rated voltage (U_e)

	phase-neutral	VAC	230
Operating voltage range	phase-neutral	VAC	184...264
Connection method			Direct

Current

IEC maximum (I_{max})	A	40
IEC minimum (I_{min})	A	0.25
IEC rated (I_{ref-Ib})	A	5
IEC start (I_{st})	mA	20
Transition (I_{tr})	A	0.5

Accuracy

Active energy		Class B (EN 50470-3)
Reactive energy		Class 2 (IEC/EN 62053-23)

RS485 serial interface

Baud rate	bps	Programmable 1200...38400
-----------	-----	------------------------------

Insulations

Rated insulation voltage U_i IEC/EN	V	250
Rated impulse withstand voltage U_{imp}	kV	6
Operating frequency withstand voltage	kV	4

Functions

Type of communication port		RS485
----------------------------	--	-------

Mechanical features

Housing type				Polyamide
Terminals type				Fixed
Conductor cross section				
		min	mm ²	1.5
		Max	mm ²	10
		min	AWG	16
		Max	AWG	6

Tightening torque (Max)

Nm	1.5
lbin	14

Fixing

Din rail

Weight

g	90
---	----

Ambient conditions

Temperature

Operating temperature

min	°C	-25
max	°C	+70

Storage temperature

min	°C	-25
max	°C	+70

Relative humidity

%	<80
---	-----

Max altitude

m	2000
---	------

Maximum Pollution degree

2

Overvoltage category

III

Protection degree

IP40 (Front)


Mechanical environment

Class M1


Magnetic environment

Class E1

Dimensions

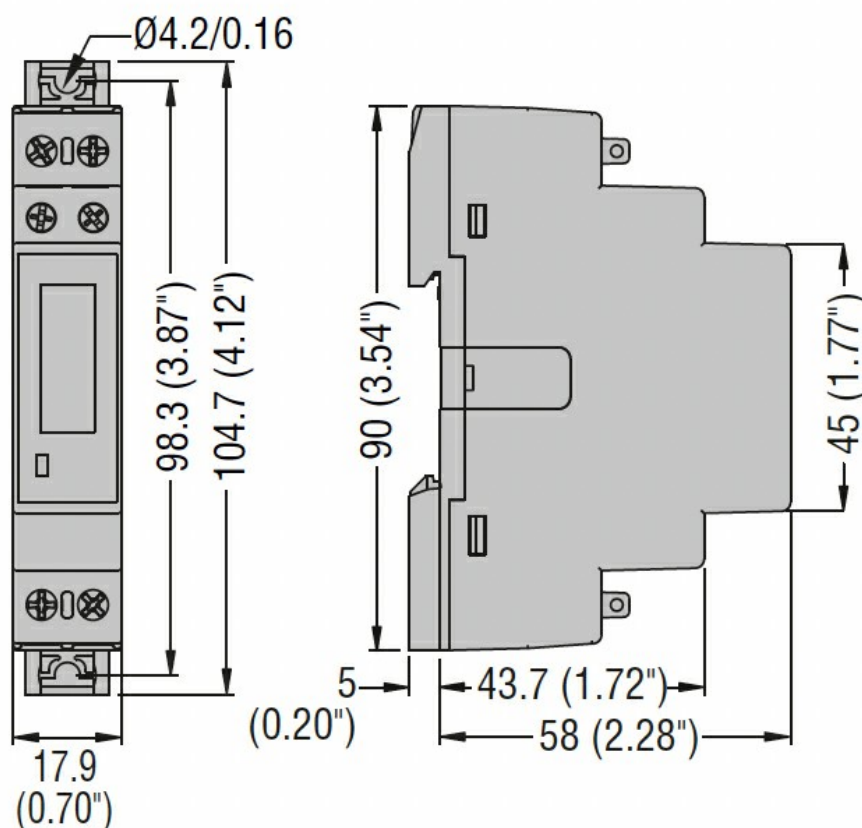

Wiring diagrams

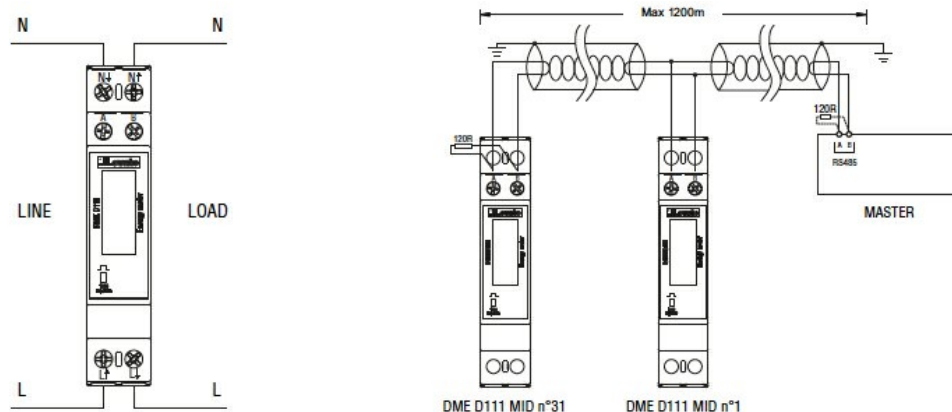

Certifications and compliance

Compliance

EN50470-1

EN50470-3

TR 50579

Certificates

MID (modulo B + D)

RCM

ETIM classification

ETIM 8.0

EC001506 -
Kilowatt-hour
meter