


GSM MODEM, RECEIVING AND SENDING MESSAGES FOR REMOTE CONTROLS AND ALARM SIGNALS. IP69K FOR EXTERNAL USE ANTENNA WITH 2.5M CABLE AND RJ45-USB PROGRAMMING CABLE (INCLUDED). 100...240VAC, 1 DIGITAL INPUT, 1 ANALOGIC INPUT (0...10V, 0...MA, NTC), 1 RELAY OUTPUT



General characteristics

Description	Remote control and monitoring GSM/4G modem via SMS		
Functions	GSM/4G modem		
Rated power supply voltage	100...240VAC		
Monitoring method			
Transmission technology	GSM/4G		
Connectivity with Synergy and Xpress	No		
Interface			
Mobile communication	GSM/4G		
Mechanical features			
Conductor cross section	min	mm ²	0.2
	Max	mm ²	2.5
	min	AWG	24
	Max	AWG	12
Fixing	DIN rail EN 50022		
Weight		g	200
Ambient conditions			
Temperature			
Operating temperature	min	°C	-20
	max	°C	+60
Resistance & Protection			
Frontal IP degree	IP40		
Terminals IP degree	IP20		
Dimensions			

GSM MODEM, RECEIVING AND SENDING MESSAGES FOR REMOTE CONTROLS AND ALARM SIGNALS. IP69K FOR EXTERNAL USE ANTENNA WITH 2.5M CABLE AND RJ45-USB PROGRAMMING CABLE (INCLUDED). 100...240VAC, 1 DIGITAL INPUT, 1 ANALOGIC INPUT (0...10V, 0...mA, NTC), 1 RELAY OUTPUT

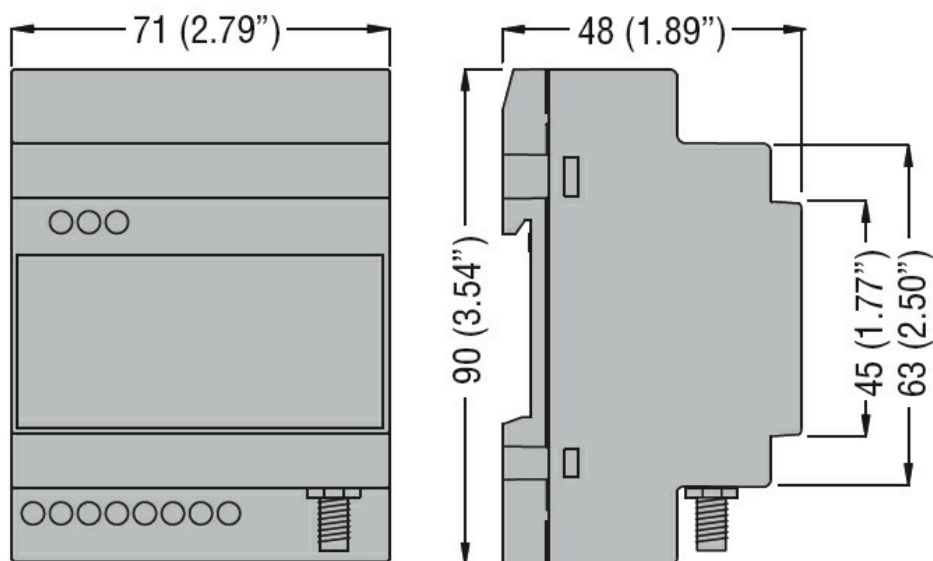

Certifications and compliance

Certifications

IEC/EN 62311

IEC/EN 62368

Compliance

/

ETIM classification

EC000066 - Power contactor, AC switching