





Electrical features			
IEC maximum rated current (In)	A		30
IEC maximum rated voltage (Un)	V		600
IEC Utilization category	AC22B 500V - AC21B 690V		
Power dissipation Max	W		3
Derating factor of rated current In for different ambient temperature	20°C	1	
	30°C	0.95	
	40°C	0.9	
	50°C	0.8	
	60°C	0.7	
	70°C	0.5	
	Derating factor of rated current In for side by side fuse holders (poles)	1-4	1
5-6		0.8	
7-9		0.7	
≥10		0.6	
Rated current (In)		A	
Ambient conditions			
Operating temperature	min	°C	-20
	max	°C	+70
Storage temperature	min	°C	-40
	max	°C	+80
Max altitude	m		3000
Mechanical features			
Operating position	normal allowable	Vertical plan Any	
		35mm DIN rail	
Fixing			
Tightening torque for terminals	min	Nm	2
	max	Nm	2.5
	min	lbin	18
	max	lbin	22
Conductor section	Flexible max (IEC)	mm²	16
	- Flexible max (AWG/kcmil)		8
	Rigid max (IEC)	mm²	16
	- Rigid max (AWG/kcmil)		8
Weight	g		14
Resistance & Protection			
Frontal IP degree	IP20		

Dimensions

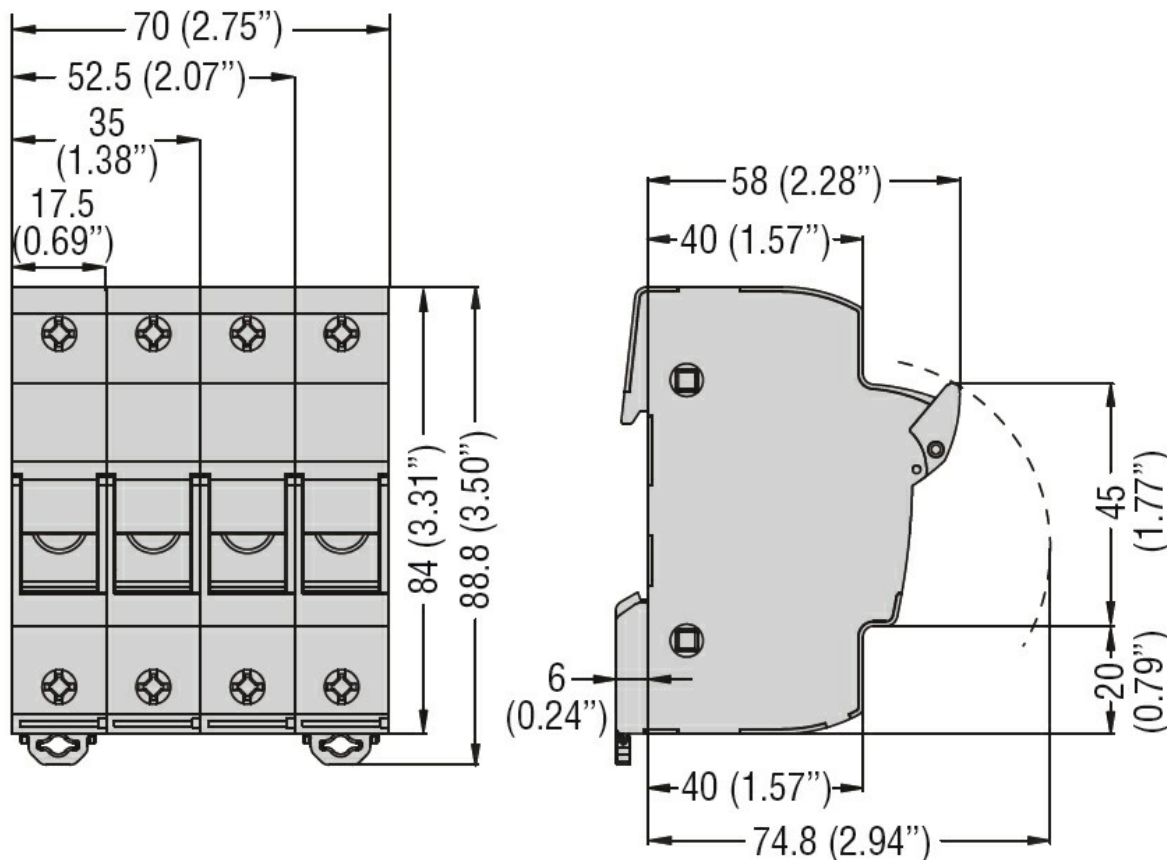

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n°4248.1

CSA C22.2 n°4248.4.

IEC/EN 60269-1

IEC/EN 60269-2

IEC/EN 60947-1

IEC/EN 60947-3

UL 4248-1

UL 4248-4

Certifications

EAC

UL

ETIM classification

ETIM 8.0

EC002705 -
Holder for
cylindrical fuse