




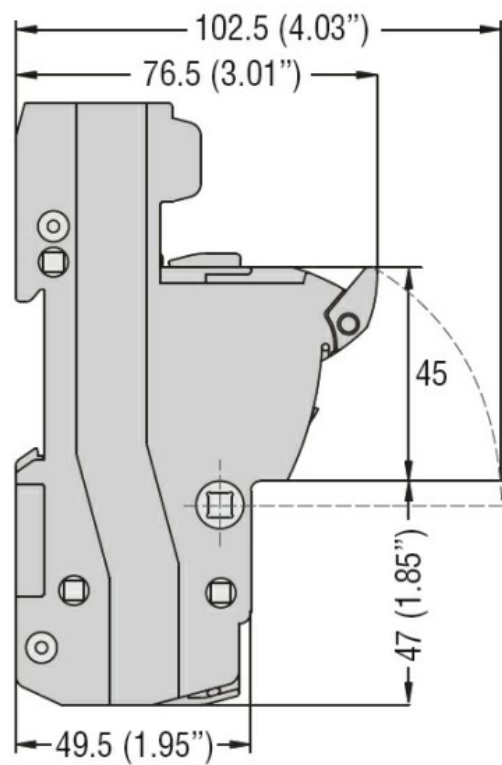

Electrical features			
IEC maximum rated current (In)	A	125	
IEC maximum rated voltage (Un)	V	690	
IEC Utilization category		AC21B 690V	
Power dissipation Max	W	9.5 (max. 12)	
Derating factor of rated current In for different ambient temperature			
	20°C		1
	30°C		0.95
	40°C		0.9
	50°C		0.8
	60°C		0.7
	70°C		0.5
Derating factor of rated current In for side by side fuse holders (poles)			
	1-4		1
	5-6		0.8
	7-9		0.7
	≥10		0.6
Rated current (In)	A	100 (max 125)	
Ambient conditions			
Operating temperature			
	min	°C	-20
	max	°C	70
Storage temperature			
	min	°C	-40
	max	°C	80
Max altitude	m	3000	
Mechanical features			
Operating position	normal allowable	Vertical plan Any	
Fixing		35mm DIN rail	
Tightening torque for terminals			
	max	Nm	4
	max	lbin	2.9
Conductor section			
	Flexible max (IEC)	mm²	35
	- Flexible max (AWG/kcmil)		2
	Rigid max (IEC)	mm²	50
	- Rigid max (AWG/kcmil)		1
Weight	g	334	
Resistance & Protection			
Frontal IP degree		IP20	
Dimensions			

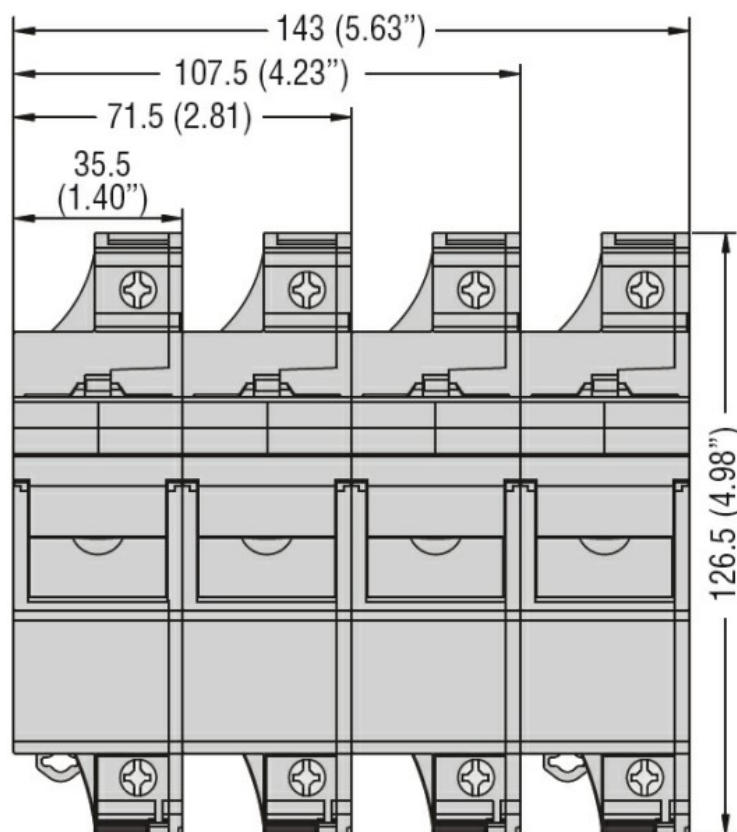

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n°4248.1

IEC/EN 60269-1

IEC/EN 60269-2

IEC/EN 60947-1

IEC/EN 60947-3

UL 4248-1

Certifications

cUR

EAC

ETIM classification

ETIM 8.0

EC002705 -
Holder for
cylindrical fuse