



Contact characteristics

IEC Conventional free air thermal current $I_{th} \leq 40^{\circ}\text{C}$	A	40
Reactive power for control of capacitors at Rated short time current (1s) I_{cw} (rms)	kA	0.8


Mechanical features

Tightening torque for terminals	min	Nm	1.8
	max	Nm	2
	min	Ibin	16
	max	Ibin	18


UL technical data

UL Standard	UL60947-4-1
-------------	-------------

Dimensions

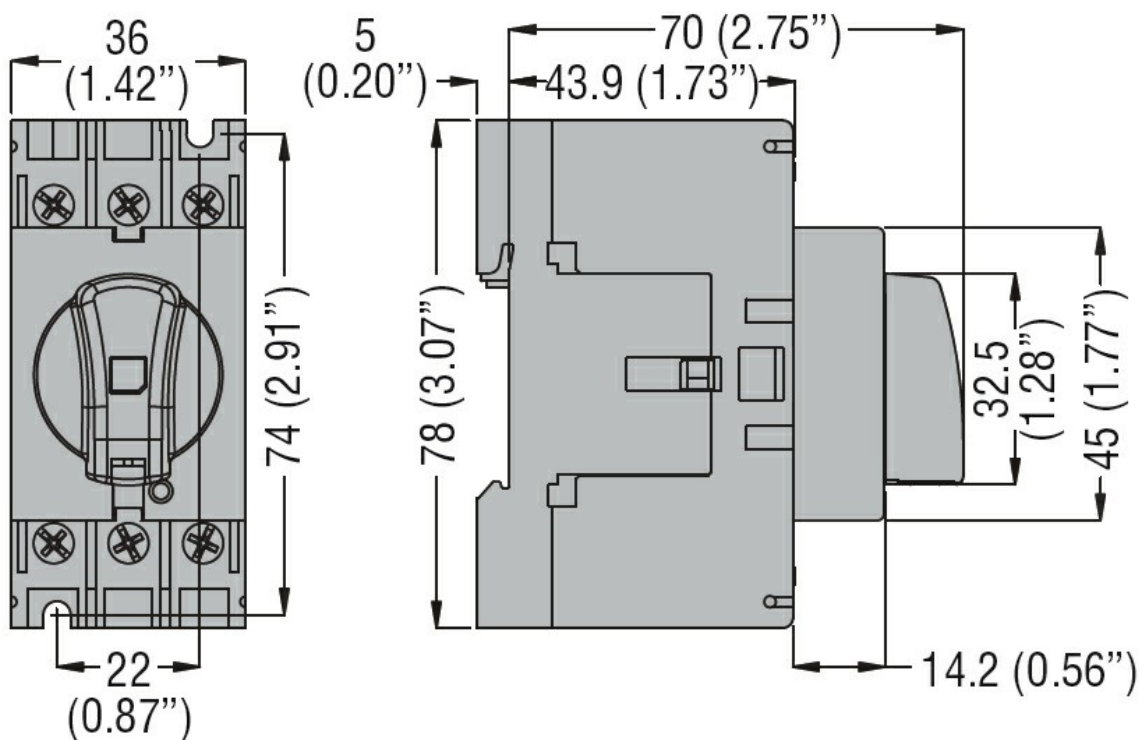

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n°60947-4-1

IEC/EN 60335-2-89

IEC/EN 60947-1

IEC/EN 60947-3

UL60947-4-1

Certifications

CCC

CSA C22.2 n. 60335-2-40:22 LZGH A2L

CSA C22.2 n°60947-4-1

CSA C22.2 No. 60335-2-89:21 LZGH A2L

cULus according to UL60947-4-1

EAC

KEMA

UL 60335-2-40 LZGH A2L

UL 60335-2-89 LZGH A2L

ETIM classification

ETIM 8.0

EC000216 -
Switch
disconnecter