



Contact characteristics

IEC Conventional free air thermal current $I_{th} \leq 40^{\circ}\text{C}$	A	10
Reactive power for control of capacitors at		
Mechanical life	cycles	100000

Mechanical features

Fixing	Side mounting
Tightening torque for terminals	


max	Nm	0.8
min	lbin	7.1

Conductor section

IEC min	mm ²	1 x 0.75
IEC max	mm ²	2 x 2.5
	g	30


Weight

Dimensions

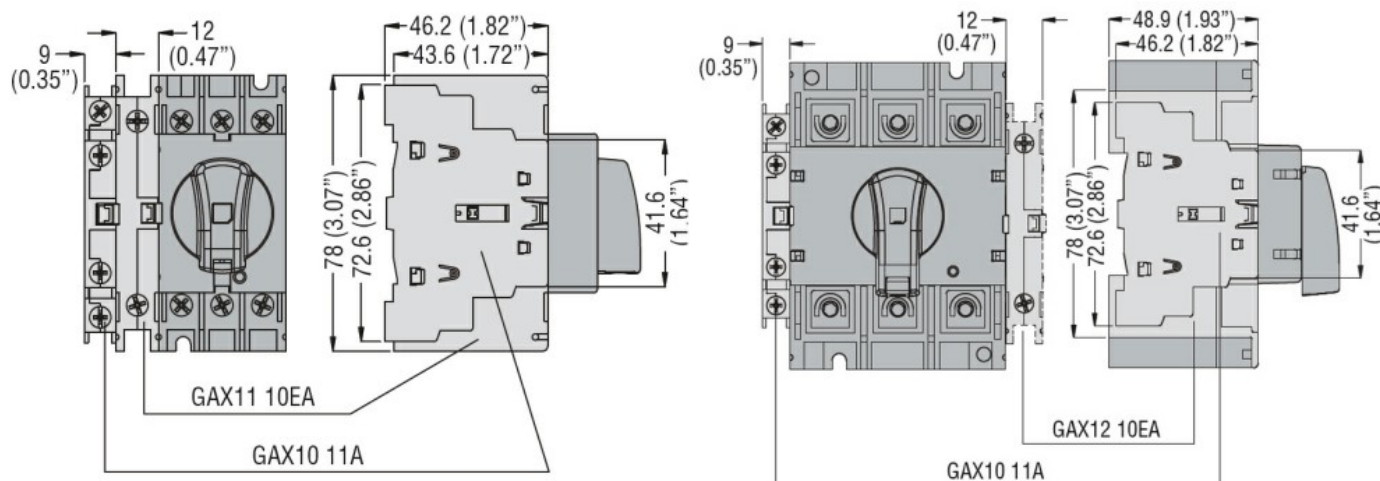

Wiring diagrams

Auxiliary contacts GAX10...



Certifications and compliance

Compliance

CSA C22.2
IEC/EN 60335-2-89
IEC/EN 60947-1
IEC/EN 60947-3

IEC/EN 60947-5-1

UL508

UL98

Certifications

CCC

CSA C22.2 n. 60335-2-40:22 LZGH A2L

CSA C22.2 n°60947-4-1

CSA C22.2 No. 60335-2-89:21 LZGH A2L

cULus according to UL60947-4-1

EAC

UL 60335-2-40 LZGH A2L

UL 60335-2-89 LZGH A2L

ETIM classification

ETIM 8.0

EC000041 -
Auxiliary contact
block