




Mechanical features

Conductor section


| | | |
|---------|-----------------|----------|
| IEC min | mm ² | 1 x 0.75 |
| IEC max | mm ² | 2 x 2.5 |

Dimensions

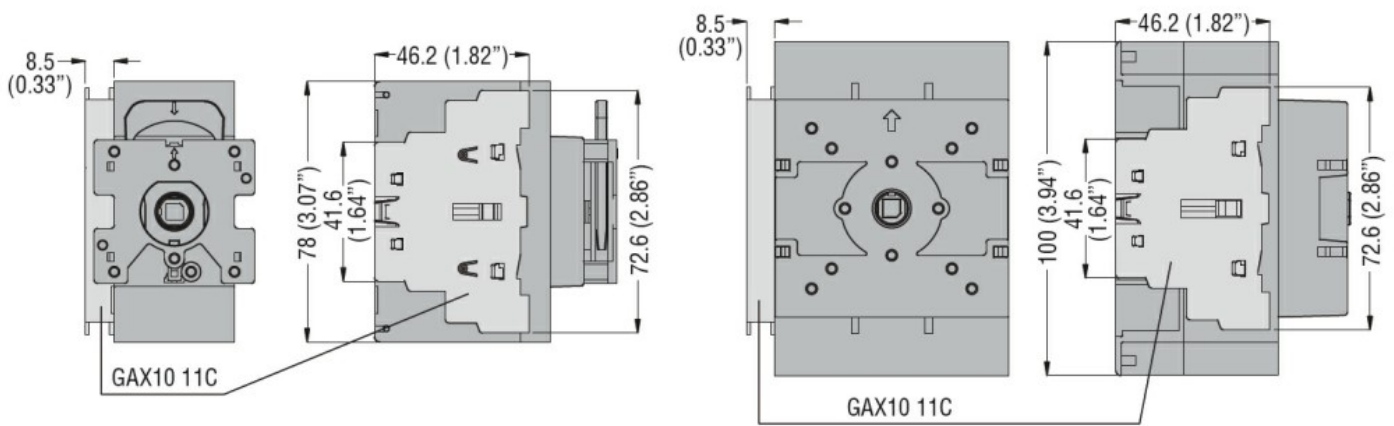

Wiring diagrams

Auxiliary contacts
GAX10...



Certifications and compliance

Compliance

- CSA C22.2
- IEC/EN 60335-2-89
- IEC/EN 60947-1
- IEC/EN 60947-3
- IEC/EN 60947-5-1
- UL508
- UL98

Certifications

- CCC
- CSA C22.2 n. 60335-2-40:22 LZGH A2L
- CSA C22.2 n°60947-4-1
- CSA C22.2 No. 60335-2-89:21 LZGH A2L
- cULus according to UL60947-4-1
- EAC

UL 60335-2-40 LZGH A2L

UL 60335-2-89 LZGH A2L

ETIM classification

ETIM 8.0

EC000041 -
Auxiliary contact
block