



**Contact characteristics**

IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$	A	10
Reactive power for control of capacitors at		
Mechanical life	cycles	100000

**Mechanical features**

Fixing	Side mounting
Tightening torque for terminals	


max	Nm	0.8
min	lbin	7.1

Conductor section			
	IEC min	mm <sup>2</sup>	1 x 0.75
	IEC max	mm <sup>2</sup>	2 x 2.5

Weight	g	30
--------	---	----

**Dimensions**

**Wiring diagrams**

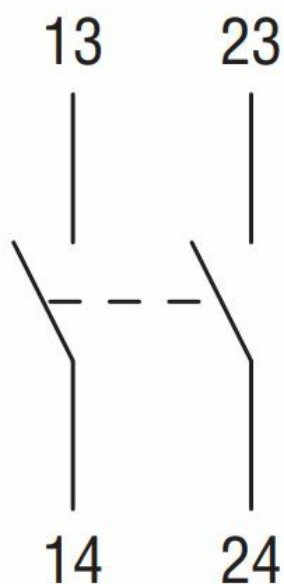

**Certifications and compliance**

Compliance	CSA C22.2
	IEC/EN 60335-2-89
	IEC/EN 60947-1
	IEC/EN 60947-3
	IEC/EN 60947-5-1
	UL508
	UL98

Certifications	CSA C22.2 n. 60335-2-40:22 LZGH A2L
	CSA C22.2 No. 60335-2-89:21 LZGH A2L

---

EAC

---

UL 60335-2-40 LZGH A2L

---

UL 60335-2-89 LZGH A2L

ETIM classification

ETIM 8.0

EC000041 -  
Auxiliary contact  
block