




### Contact characteristics

IEC Conventional free air thermal current  $I_{th} \leq 40^\circ\text{C}$

A 125

### Dimensions

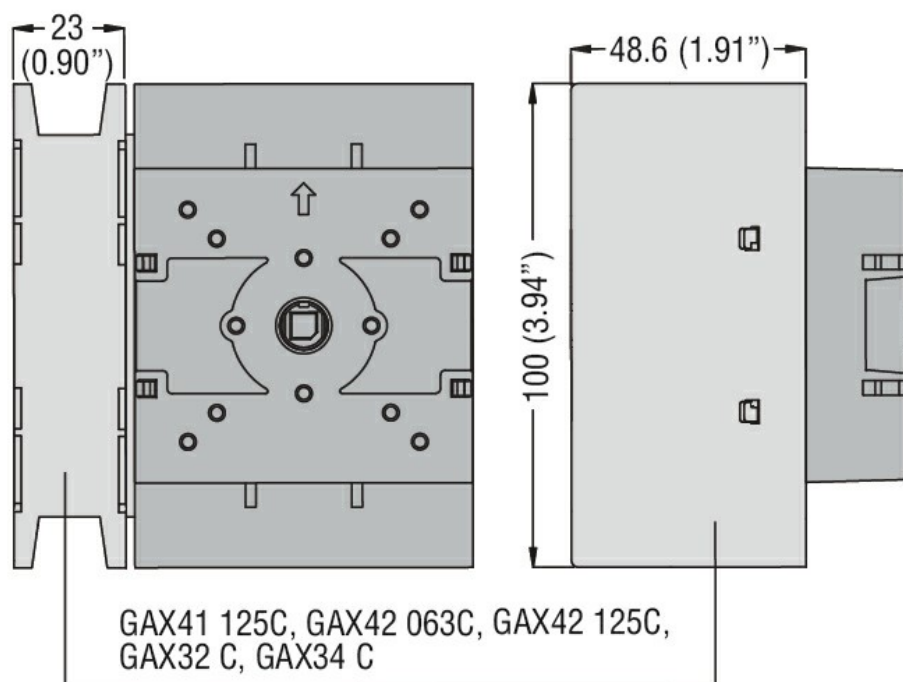

### Wiring diagrams

Earth terminal  
GAX33... - GAX34...



### Certifications and compliance

#### Compliance

CSA C22.2

IEC/EN 60947-1

IEC/EN 60947-3

IEC/EN 60947-5-1

UL508

UL98

#### Certifications

CSA C22.2 n°4

---

cULus according to UL98

---

EAC

ETIM classification

ETIM 8.0

EC002498 -  
Accessories/spare  
parts for low-  
voltage switch  
technology