




Mechanical features


Conductor section

IEC min	mm ²	0.75
IEC max	mm ²	6
AWG/kcmil min		18
AWG/kcmil max	kcmil	10

Dimensions

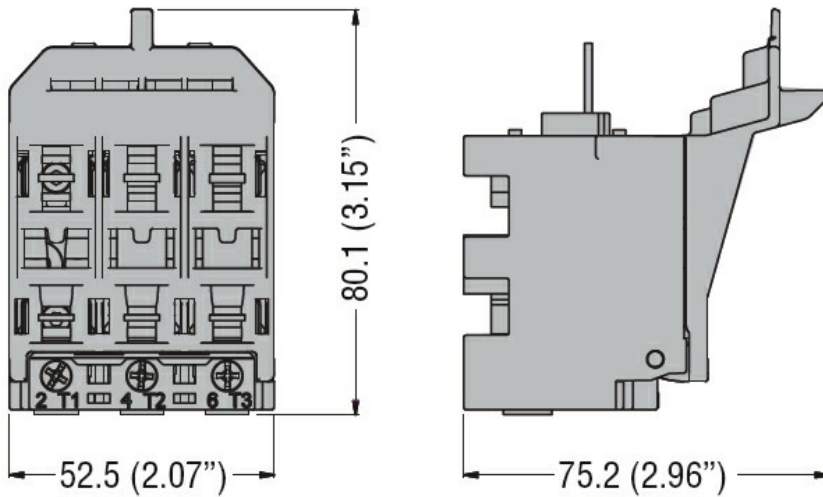

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2
IEC/EN 60947-1
IEC/EN 60947-3
UL508
UL98

Certifications

CSA C22.2 n°4
cULus according to UL98
EAC

ETIM classification

ETIM 8.0

EC002498 -
Accessories/spare
parts for low-
voltage switch
technology