




Contact characteristics

IEC Conventional free air thermal current  $I_{th} \leq 40^{\circ}C$  A 40

Mechanical features


|                                 |     |      |     |
|---------------------------------|-----|------|-----|
| Tightening torque for terminals |     |      |     |
|                                 | min | Nm   | 1.8 |
|                                 | max | Nm   | 2   |
|                                 | min | lbin | 16  |
|                                 | max | lbin | 18  |

Dimensions

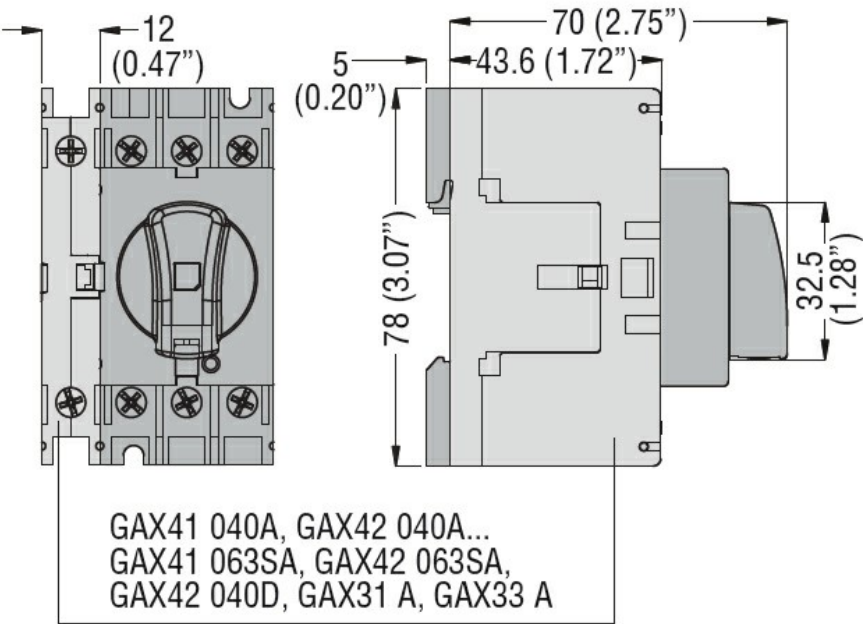

Wiring diagrams

Fourth pole add on  
GAX42... GAX41...

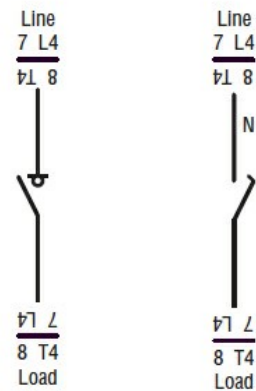

Certifications and compliance

## Compliance

CSA C22.2

IEC/EN 60335-2-89

IEC/EN 60947-1

IEC/EN 60947-3

UL508

UL98

## Certifications

CCC

CSA C22.2 n. 60335-2-40:22 LZGH A2L

CSA C22.2 n°60947-4-1

CSA C22.2 No. 60335-2-89:21 LZGH A2L

cULus according to UL60947-4-1

EAC

UL 60335-2-40 LZGH A2L

UL 60335-2-89 LZGH A2L

## ETIM classification

ETIM 8.0

EC002498 -  
Accessories/spare  
parts for low-  
voltage switch  
technology