



**Contact characteristics**


IEC Conventional free air thermal current  $I_{th} \leq 40^\circ\text{C}$  A 125

**Mechanical features**

Tightening torque for terminals

	min	Nm	5
	max	Nm	6
	min	lbin	45
	max	lbin	54

**Dimensions**

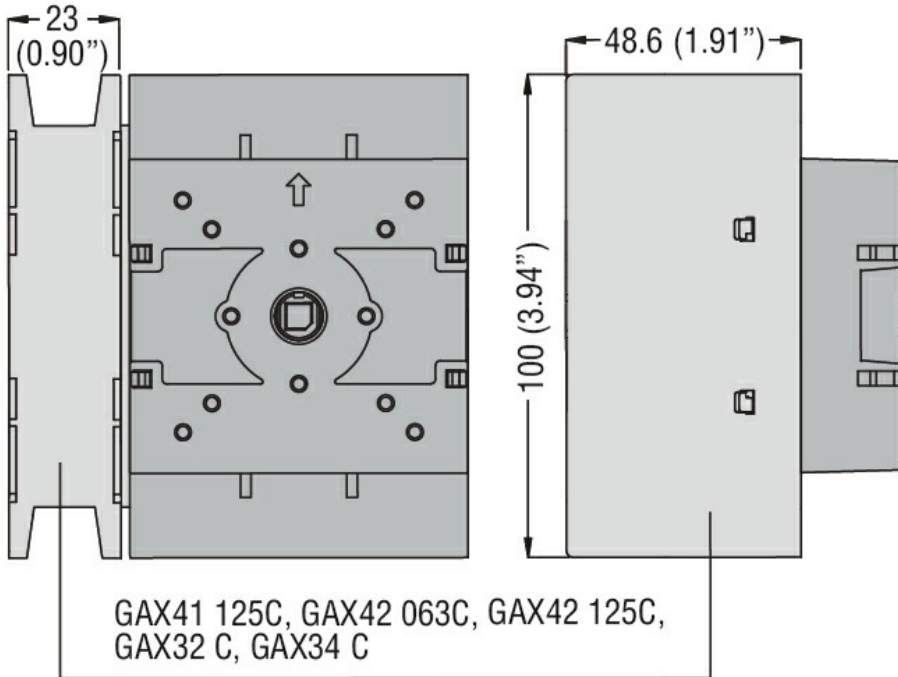

**Wiring diagrams**



**Certifications and compliance**

Compliance CSA C22.2

---

IEC/EN 60335-2-89

---

IEC/EN 60947-1

---

IEC/EN 60947-3

---

UL508

---

UL98

Certifications

---

CCC

---

CSA C22.2 n. 60335-2-40:22 LZGH A2L

---

CSA C22.2 n°4

---

CSA C22.2 No. 60335-2-89:21 LZGH A2L

---

cULus according to UL98

---

EAC

---

UL 60335-2-40 LZGH A2L

---

UL 60335-2-89 LZGH A2L

ETIM classification

ETIM 8.0

EC002498 -  
Accessories/spare  
parts for low-  
voltage switch  
technology