



Contact characteristics


IEC Conventional free air thermal current $I_{th} \leq 40^{\circ}\text{C}$ A 125

Mechanical features

Tightening torque for terminals


min	Nm	5
max	Nm	6
min	lbin	45
max	lbin	54

Dimensions

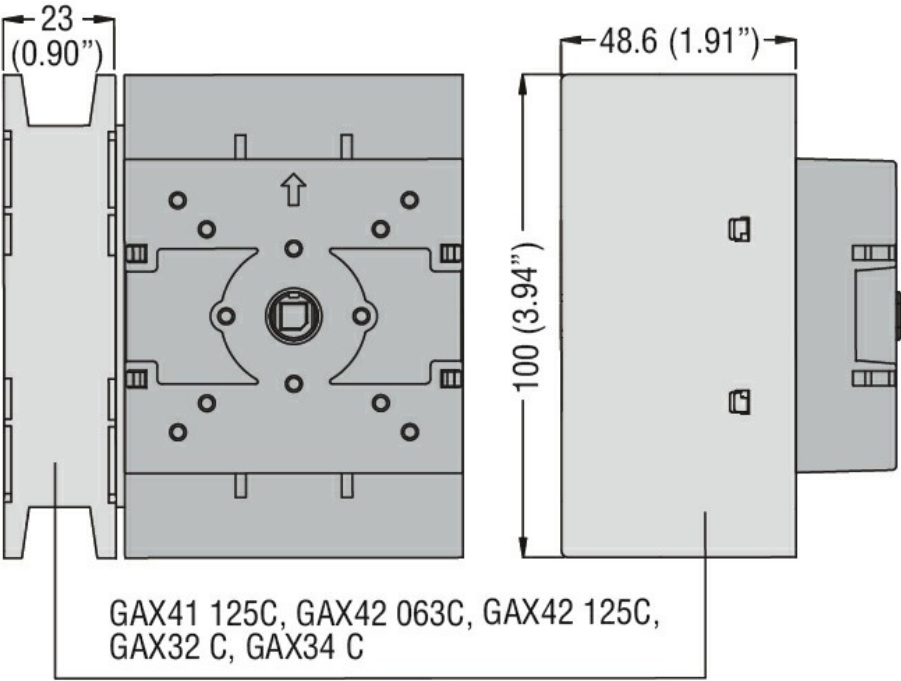

Wiring diagrams

Fourth pole add on
GAX42... GAX41...

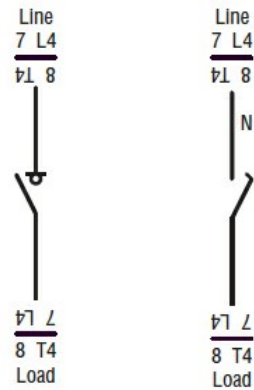

Certifications and compliance

Compliance	CSA C22.2
	IEC/EN 60335-2-89
	IEC/EN 60947-1
	IEC/EN 60947-3
	UL508
	UL98
Certifications	CCC
	CSA C22.2 n. 60335-2-40:22 LZGH A2L
	CSA C22.2 n°14
	CSA C22.2 No. 60335-2-89:21 LZGH A2L
	cULus according to UL508
	EAC
	UL 60335-2-40 LZGH A2L
	UL 60335-2-89 LZGH A2L

ETIM classification

ETIM 8.0	EC002498 - Accessories/spare parts for low- voltage switch technology
----------	---