



Mechanical features

Conductor section

Weight

g 73

UL technical data

UL Standard

UL60947-4-1

Ambient conditions

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature

min	°C	-40
max	°C	+70

Max altitude

m 3000

Resistance & Protection


Frontal IP degree

IP65

Pollution degree

3

Dimensions

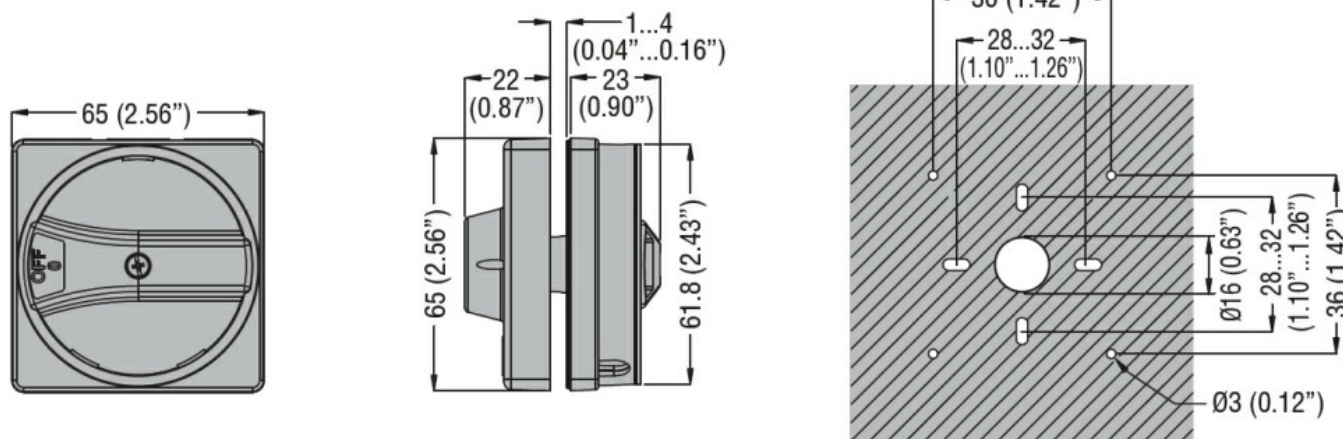

Certifications and compliance

Compliance

CSA C22.2

IEC/EN 60947-1

IEC/EN 60947-3

UL508

UL98

Certifications

CSA C22.2 n°4

CSA C22.2 n°60947-4-1

cULus according to UL60947-4-1

cULus according to UL98

EAC

ETIM classification

DOOR-COUPLING HANDLE, PADLOCKABLE. RED/YELLOW, ROTATING, FOR GA...A,
GA063SA, GA...C AND GA...D. SCREW FIXING. RECESSED SELECTOR. 5MM/0.2". IEC
IP65/UL TYPE 4X

ETIM 8.0

EC000230 -
Door coupling
handle for
switchgear