



Resistance & Protection




UL degree of protection

UL/CSA Type
4/4X

IP degree of protection


IP65

Dimensions

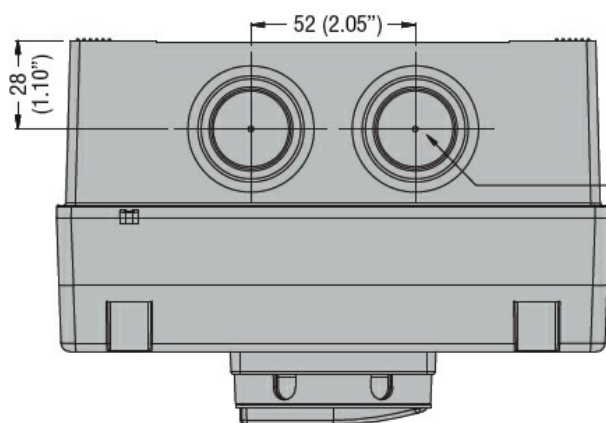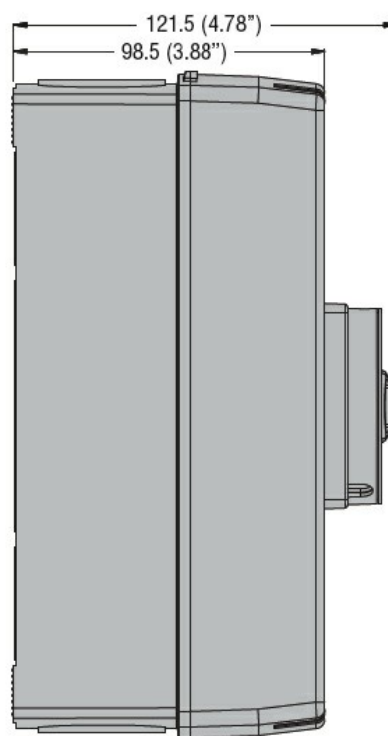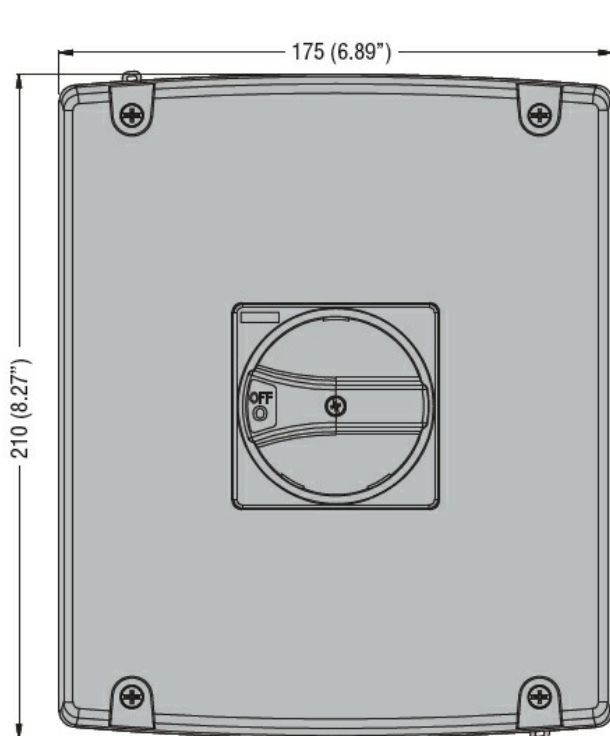

PG16 / M25
PG29 / M32
knockouts on top
and bottom

Drilling for surface fixing

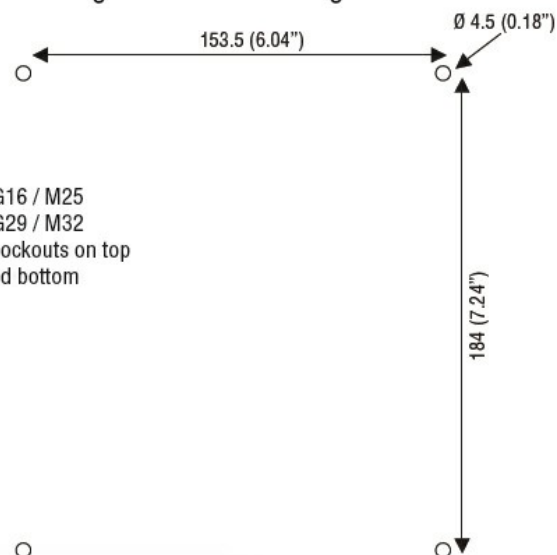

Certifications and compliance

EMPTY NON-METALLIC ENCLOSURE UL/CSA TYPE 4/4X, FOR SWITCH DISCONNECTORS.
WITH ROTATING RED/YELLOW HANDLE, FOR GA063SA. ENCLOSURE DIMENSIONS:
175X210X99MM/6.9X8.3X3.9"

Compliance

IEC/EN 60947-1

IEC/EN 60947-3

Certifications

cULus

EAC

ETIM classification

ETIM 8.0

EC000712 -
Empty enclosure
for switchgear