

General characteristics

Switching diagram	52 - Changeover switch 2 poles
N° of elements	2
Mounting form	U - Front mounting with black handle

Contact characteristics

Rated insulation voltage Ui			
	IEC/EN	V	480
	UL/CSA	V	240
Rated impulse withstand voltage Uimp			
		kV	4
Conventional free air thermal current Ith			
	IEC/EN	A	10
	UL/CSA	A	10
Rated operational voltage			
		V	480
Rated operational impulse voltage			
		kV	4
Maximum fuse size for short-circuit protection In (gG)			
	10kA	A	16
Rated short time current Icw			
	1s	kA	250
Conductivity			
			10/5 mA/V
Operational current Ie IEC/EN			
AC1/AC21A			
		A	10
AC15			
	110V	A	5
	220/230V	A	3
	380/400V	A	2
Rated operational power in AC			
Three-phase AC-3			
	220/230V	kW	1.5
	380/440V	kW	2.2
Single-phase AC-3			
	110V	kW	0.3
	220/230V	kW	0.55
	380/440V	kW	0.75
Three-phase AC23A			
	220/230V	kW	1.8
	380/440V	kW	3
Single-phase AC23A			
	110V	kW	0.7
	220/230V	kW	0.75
	380/440V	kW	1.1
Rated operational current in DC			
DC21A			
	48V	A	10
	60V	A	7
	110V	A	2
	220V	A	0.7
	440V	A	0.2
DC13			
	24V	A	3

ROTARY CAM SWITCH GF SERIES, CHANGEOVER SWITCH 2 POLES 10A, FOR FRONT MOUNTING WITH BLACK HANDLE, FRONT PLATE 30X30MM

	48V	A	3
	60V	A	2
	110V	A	1
	220V	A	0.3
	440V	A	0.1
Power dissipation	W		0.4

Mechanical features

Terminals screw			2.5M
Tightening torque for terminals max	Nm		0.4

Conductor size

AWG - Rigid cable

min	AWG	20
Max	AWG	14

AWG - Flexible cable

min	AWG	20
Max	AWG	14

Conductor size (IEC) - Flexible cable

min	mm ²	0.5
Max	mm ²	1.5

Conductor size (IEC) - Rigid cable

min	mm ²	0.5
Max	mm ²	1.5

Mechanical life	cycles		1x10 ⁶
-----------------	--------	--	-------------------

UL technical data

Motor power for direct-on-line control

for three-phase motor

240V	HP	2
------	----	---

for single-phase motor

240V	HP	0.75
------	----	------

Ambient conditions

Temperature

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature


min	°C	-40
max	°C	+70

Resistance & Protection

Frontal IP degree	IP40
-------------------	------


Terminals IP degree	IP20
---------------------	------

Dimensions

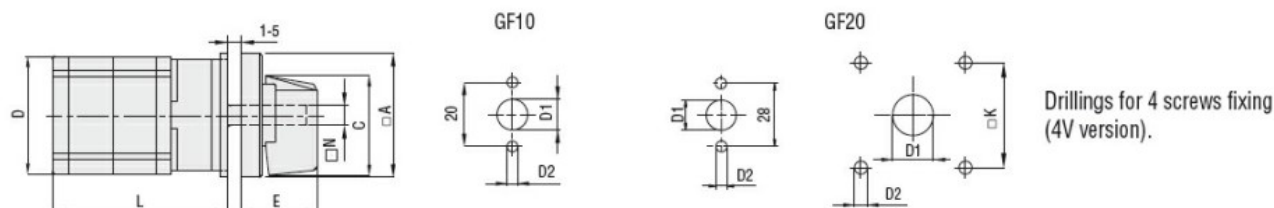

Series	Dimensions								L Number of elements											
	□A	C	D	ØD1	ØD2	E	□K	N	1	2	3	4	5	6	7	8	9	10	11	12
GF10	30	24	29	9	3.2	18.5	—	Ø5	40	52	64	76	88	100	112	124	—	—	—	—
GF20	48	39.5	36	12	5	26.5	36	□6	44	57.5	71	84.5	98	111.5	125	138.5	152	165.5	179	192.5

Wiring diagrams

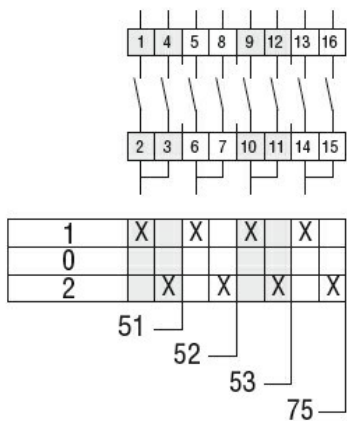

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-3
IEC/EN/BS 60947-5-1
UL60947-4-1

Certificates

cULus
EAC

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete