



**Contact characteristics**

IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$	A	10
Rated insulation voltage $U_i$ IEC/EN	V	690
Conductivity		1mA 5V
UL/CSA and IEC/EN 60947-5-1 designation		A600 Q600
Operating current $I_e$		
AC15		
Operating current 24V	A	6
Operating current 120V	A	6
Operating current 240V	A	6
Operating current 400V	A	3
Operating current 480V	A	1.5
Operating current 500V	A	1.4
Operating current 600V	A	1.2
DC13		
Operating current 12V	A	3
Operating current 24V	A	3
Operating current 48V	A	1.5
Operating current 125V	A	0.55
Operating current 250V	A	0.27
Operating current 440V	A	0.15
Operating current 500V	A	0.13
Operating current 600V	A	0.1

Reactive power for control of capacitors at Electrical life	cycles	1000000
---	--------	---------

**Mechanical features**

Operating force	kg-lb	$\leq 0.5\text{Kg}/1.1\text{lb}$
Terminals	type screw	Screw Screw
Tightening torque for terminals	max Nm	1
Conductor section	IEC max $\text{mm}^2$	1 or 2 / 2.5
AWG/kcmil conductor section	max	14
Weight	g	11
Operating temperature	min $^\circ\text{C}$	-25
	max $^\circ\text{C}$	+70
Storage temperature	min $^\circ\text{C}$	-40
	max $^\circ\text{C}$	+85


**Resistance & Protection**

IP degree of protection


IP20

**Dimensions**

GLXTU... auxiliary contacts

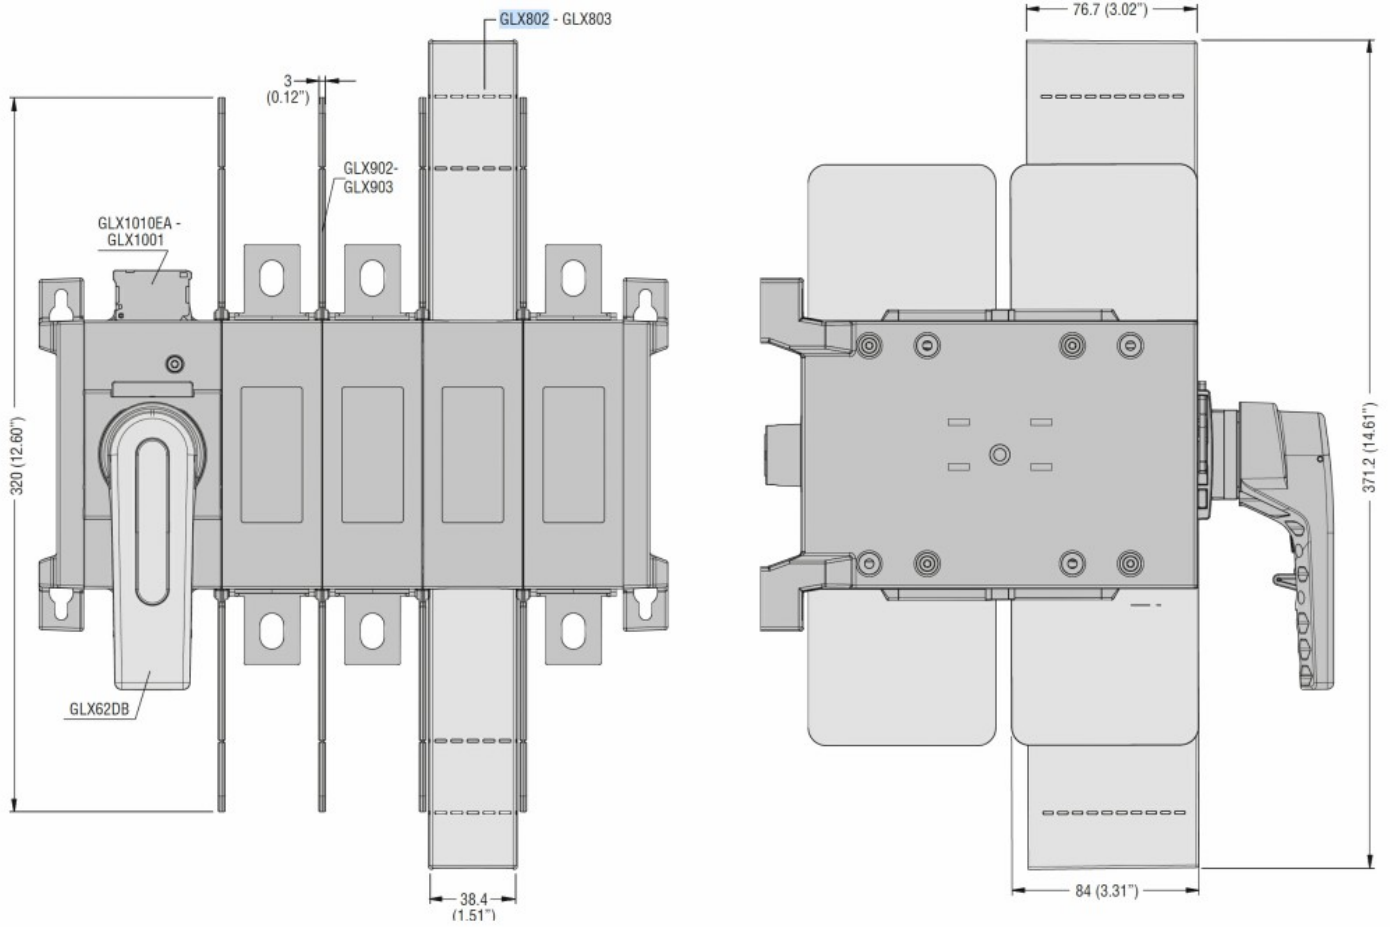

**Wiring diagrams**



**Certifications and compliance**

Compliance

IEC/EN 60947-1

IEC/EN 60947-3

Certifications

cULus

**ETIM classification**

ETIM 8.0

EC000041 -  
Auxiliary contact  
block