




Contact characteristics

IEC Conventional free air thermal current $I_{th} \leq 40^{\circ}\text{C}$	A	320
Rated insulation voltage U_i IEC/EN	V	1000
Rated impulse withstand voltage U_{imp}	kV	12
Operating current I_e		
AC21A		
	400V	A 320
	500V	A 320
	690V	A 320
AC22A		
	400V	A 320
	500V	A 320
	690V	A 320
AC23A		
	400V	A 320
	500V	A 320
	690V	A 320

Dimensions

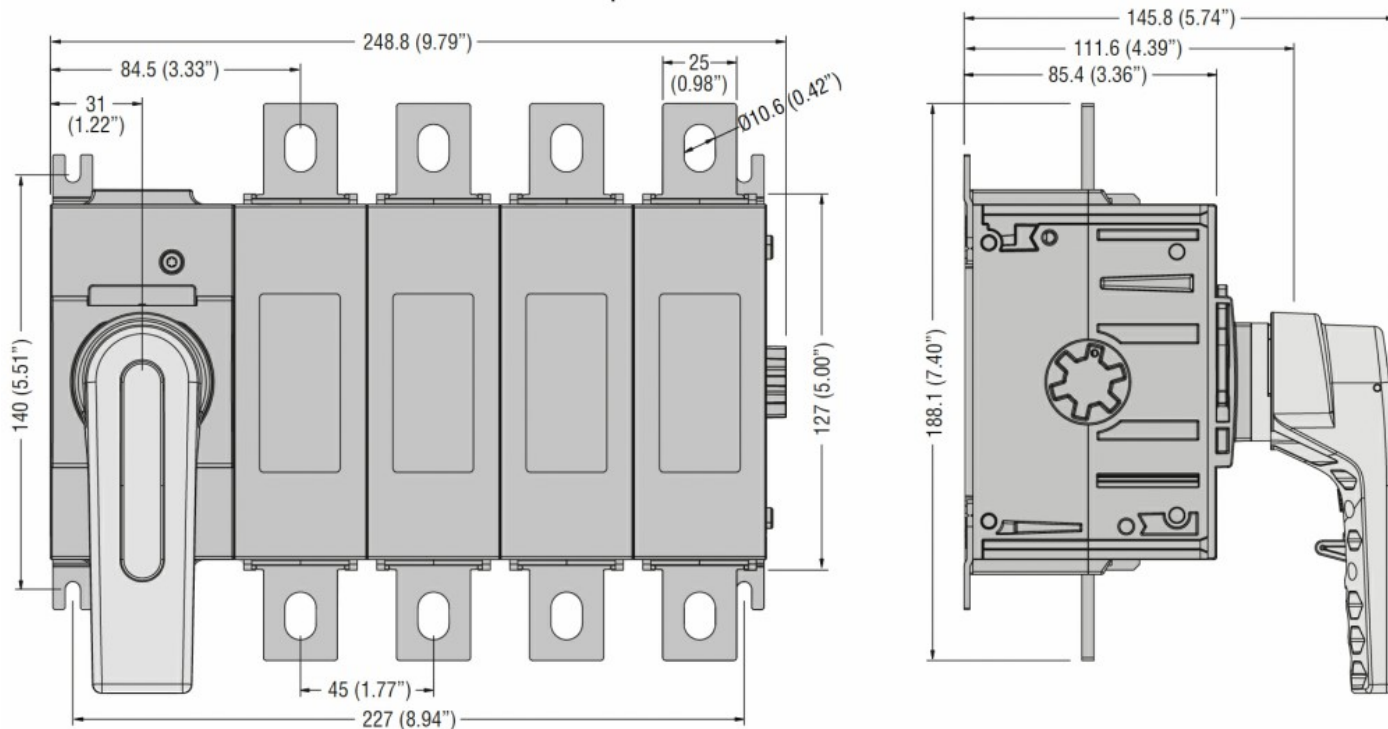

Wiring diagrams



Certifications and compliance

Compliance

IEC/EN 60947-1	
IEC/EN 60947-3	

ETIM classification

ETIM 8.0

EC002498 -
Accessories/spare
parts for low-
voltage switch
technology